

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-047-20329-00-00  
Spot: N2NWNESW Sec/Twnshp/Rge: 22-24S-16W  
2480 feet from S Section Line, 1700 feet from W Section Line  
Lease Name: ZUERCHER 2 Well #: 1  
County: EDWARDS Total Vertical Depth: 4360 feet

Operator License No.: 5042  
Op Name: EDMISTON OIL COMPANY, INC.  
Address: 125 N MARKET STE 1130  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4358	0	WITH 150 SX CMT
SURF	8.625	331		WITH 275 SX CMT

\$ 141.70

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/26/2007 10:00 AM  
Plug Co. License No.: 5042 Plug Co. Name: EDMISTON OIL COMPANY, INC.  
Proposal Rcvd. from: DALE MAY Company: EDMISTON OIL COMPANY, INC. Phone: (316) 265-5241

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 09/26/2007 4:10 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

CASING HOLES @ 400'. TUBING FISH @ 3425'. PUMPED 30 SX CMT THROUGH TUBING @ 3398' WITH 100# HULLS MIXED IN. GOOD CIRCULATION UP 4 1/2" & 8 5/8". PERFORATED 4 1/2" @ 1090'. RAN TUBING TO 1090'. PUMPED 156 SX CMT CIRCULATING CMT TO SURFACE UP 4 1/2" & 4 1/2" X 8 5/8" ANNULUS. PULLED TUBING OUT OF HOLE. TOPPED HOLE OFF WITH 30 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4308	4311		
4302	4306		
4267	4273		
4257	4263		

INVOICED  
DATE 10/15/07  
INV. NO. 2008060570

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

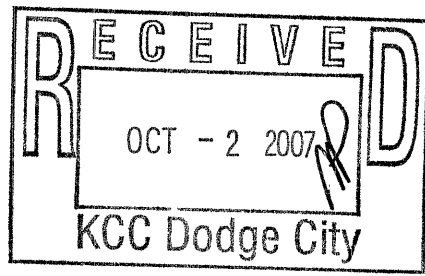

Signed Richard W. Lacey  
(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION Form CP-23

OCT 09 2007

CONSERVATION DIVISION  
WICHITA, KS