


15-163-00532-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Rooks County. Sec. 1 Twp. 10S Rge. 19W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SE SE
Lease Owner Prime Drilling Company
Lease Name Ira Mayhew Well No. 1
Office Address 1005 Central Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-12-53 19
Application for plugging filed 12-16-53 19
Application for plugging approved 19
Plugging commenced 12-12-53 19
Plugging completed 12-12-53 19
Reason for abandonment of well or producing formation Dry Hole

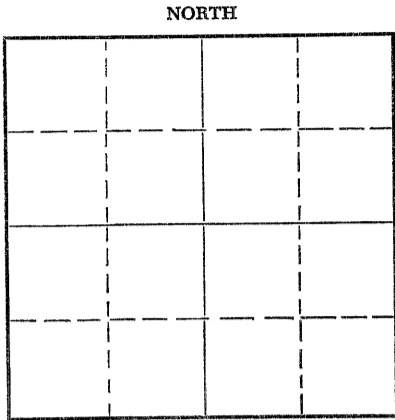

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation None Depth to top Bottom Total Depth of Well 3850 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy cut drilling mud from bottom to 160 feet set plug at 160' with 15 sax of cement; filled hole with extra heavy drilling mud from 160' to 40'; set plug at 40' with 10 sax of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Prime Drilling Company
Address 1005 Central Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Prime Drilling Company (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *J. J. Campbell*
1005 Central Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of December, 1953.

My commission expires 10-11-57

Patricia Jagan
Notary Public.

24-7366-S 3-53-20M

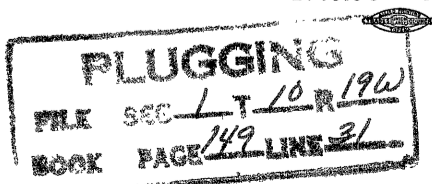

12-17-1953

15-163-00532-00-00

ROTARY DRILLING LOG

OPERATOR: Prime Drilling Company
Ira Mayhew #1
SE SE SE 1-10S-19W
Rooks County, Kansas

CONTRACTOR: Prime Drilling Company
COMM: 12-1-53
COMP: 12-12-53

FORMATION

REMARKS

Surface Clay & Rock	20
Sand	110
Shale	165
Shale & Shells	750
Sand & Red Bed	800
Sand	825
Sand & Shale	900
Shale & Shells	1045
Sand	1240
Shale, Red Bed & Shells -	1425
Red Bed, Shale & Shells	1595
Shale & Shells	1660
Shale & Lime	2080
Lime	3305
Lime & Shale	3710
Chert	3750
Chert & Congr	3805
Lime & Shale	3813
Total Depth	3850

Ran 8 1/2 its. 8-5/8ths " Surface
Set @ 165' cemented with 135 sax

We certify that the above log is true and correct to the best of our knowledge and belief.

PRIME DRILLING COMPANY

BY R.R. McNeil

PLUGGING
 FILE NO. L-10 196
 DATE 149 31