


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

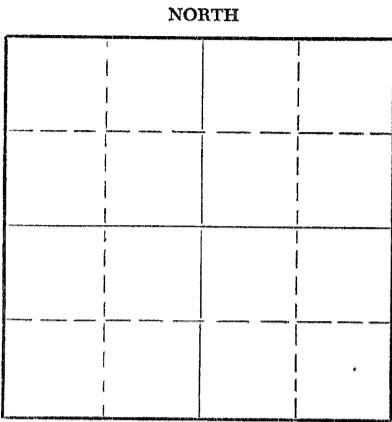

Locate well correctly on above
Section Plat

Rocks _____ County. Sec. 10 Twp. 10S Rge. _____ (E) 19 (W)
Location as "NE/CNW/SW" or footage from lines NE NE NW
Lease Owner Jones, Shelburne & Farmer, Inc.
Lease Name Burton Well No. _____
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 8-28 19 52
Application for plugging filed 8-28 19 52
Application for plugging approved 8-28 19 52
Plugging commenced 8-28 19 52
Plugging completed 8-28 19 52
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production Never produced 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Elden Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3754 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	164	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1. Hole filled with heavy mud.
2. Halliburton plug pushed to 160'.
3. One-half sack hulls dumped on top of plug.
4. Fifteen sacks cement mixed and dumped on top of hulls.
5. Hole filled to top with heavy mud.
6. Second Halliburton plug pushed to 40'.
7. One-half sack hulls dumped on top of plug.
8. Ten sacks cement mixed and hole filled to top with same.

RECEIVED
09-04-1952
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Jones, Shelburne & Farmer, Inc.
Address Russell, Kansas

STATE OF _____, COUNTY OF _____, ss. _____ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John W. Farmer
Russell, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 1st day of September, 1952

My commission expires April 23, 1956
Bonnie Berryhill Notary Public.

RECEIVED
10 10 1952
41 28

