

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

NORTH



Locate well correctly on above Section Plat

Graham County. Sec. 14 Twp. 9 Rge. 21 ~~E~~ W (W)  
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 990'N & 330'E of W $\frac{1}{2}$  corner  
Lease Owner Continental Oil Company  
Lease Name A. Morel Well No. 3  
Office Address P. O. Box 1267, Ponca City, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 3, 19 43  
Application for plugging filed March 3, 19 43  
Application for plugging approved March 3, 19 43  
Plugging commenced March 3, 19 43  
Plugging completed March 3, 19 43  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production No Production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. C. T. Alexander, Great Bend, Kansas  
Producing formation Arbuckle Lime Depth to top 3875' Bottom 3886' Total Depth of Well 3886' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4"	240'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

The hole was filled with heavy mud to within 240' of the top where a wood plug was set and cemented with 15 sacks of cement. Hole was then filled to within 26' of top and wood plug set - cemented to within 4' of top of hole. Casing was cut off and a steel cap welded on 3' below the ground level.

PLUGGING  
FILE NO. 14-9-216  
BOOK PAGE 166 LINE 42

pd. 3/15/43  
No.

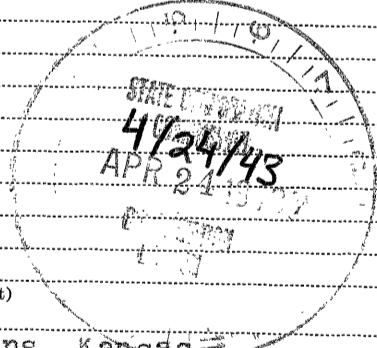

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. F. L. Dunn  
Address R. F. D. #4, Lyons, Kansas

STATE OF Kansas COUNTY OF Rice, ss. F. L. Dunn

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. L. Dunn

R. F. D. #4, Lyons, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of April 19 43

My commission expires October 21st, 1944  
Louis Mc Guire Notary Public.



STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

April 28, 1943

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

Well No. 3  
Lease A. Morel  
Description NW SW NW 14-9-21W  
County Graham  
File 66-42

Continental Oil Co.  
Ponca City, Oklahoma

Gentlemen:

The Rules and Regulations of the  
KANSAS STATE CORPORATION COMMISSION  
relative to well plugging, require the  
item or items listed below to be filed  
with this office.

Please furnish us with the \_\_\_\_\_  
well log

\_\_\_\_\_

for the above well.

STATE CORPORATION COMMISSION  
T. A. MORGAN, DIRECTOR  
CONSERVATION DIVISION

HA

BY: J. P. Roberts  
J. P. ROBERTS

*log received*  
*5/10/43*  
*H.A.*



15-065-02547-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

March 22, 1943

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

Well No.  
Lease  
Description 3  
County Morel  
File NW NW NW 14-9-21W  
Graham  
66-42

Continental Oil Co.  
Route 4  
Lyons, Kansas

Gentlemen:

The Rules and Regulations of the  
KANSAS STATE CORPORATION COMMISSION  
relative to well plugging, require the  
item or items listed below to be filed  
with this office.

Please furnish us with the \_\_\_\_\_

plugging record (on the form enclosed)  
and well log  
for the above well.

STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR  
CONSERVATION DIVISION

HA

BY: J. P. Roberts  
J. P. ROBERTS

*copy* 15-065-02547-00-02

TALLY BOOK

Tsf. No. \_\_\_\_\_ Date 2-17 1943

From \_\_\_\_\_  Replaced  
 Not Replaced

Used For \_\_\_\_\_

To A. Morel #3  Replacement  
 New Work

Used For Surface Exp

Size 10 3/4" Wt. 28# Thd. 3 Gal Cond. A

Car No. Spradash Initial \_\_\_\_\_ Manu. \_\_\_\_\_

FEET	IN.	FEET	IN.	FEET	IN.	FEET	IN.	FEET	IN.
40	-								
40	-								
40	-								
40	-								
40	-								
40	-								
240	-								

PIPING  
FILE 14 9 -- 2110  
BOOK PAGE 66 LINE 47

Hauled by \_\_\_\_\_  
Tallied by \_\_\_\_\_  
Foreman \_\_\_\_\_ Hd. Rst. \_\_\_\_\_  
Remarks \_\_\_\_\_

WELL LOG

A. Morsel No. 3

Spudded: February 19, 1943  
Drlg. Completed: March 3, 1943  
Date Plugged: March 3, 1943

Loc: 990'W & 330'E of the W $\frac{1}{2}$  corner  
of Sec. 14, Twp. 9S, Rge. 21W, in  
Graham County, Kansas

From	To	Formation	From	To	Formation
0	254	Surface Clay	3075	3150	Broken lime
254	1000	Shale & shells	3150	3468	Lime & shale
1000	1140	Shale & lime streaks	3468	3615	Broken lime
1140	1250	Sand	3615	3677	Lime
1250	1650	Shale & shells	3677	3745	Lime & shale
1650	2000	Red Bed	3745	3797	Chert & conglomerate
2000	2425	Shale & lime	3797	3875	Conglomerate
2425	2625	Broken lime & shale	3875	3886	Arbuckle Lime
2625	2780	Shale	3886' Total Depth in the Arbuckle		
2780	3075	Shale & lime	Lime formation - from ground level.		

Elevation 2272'.

Run 240' of 10-3/4" OD 28# 3-Gauge Spiral Weld surface casing; set at 242'; Cemented with 240 sacks of Haliburton cement.

Top of Arbuckle Lime 3675'.

Cored from 3875' to 3886' - recovered 1' of Arbuckle Lime - no show of oil.

Plugged and abandoned March 3, 1943.

Total Depth 3886' in Arbuckle Lime.

Note: All above footages are calculated from the ground level.

I, the undersigned, being first duly sworn upon oath, state that this well Record is true, correct and complete according to the records of this office, and to the best of my knowledge and belief.

J. L. Quinn  
Name and title of representative of company

Subscribed and sworn to before me this 7th day of May, 1943.

My commission expires October 21st, 1944.

Louis M. Quinn  
Notary Public

FLD-RDM 5/7/43  
LPC (3)  
Corporation Commission (1)  
File (1)

PLUGGING  
FILE 14 9 21W  
BOOK 66 42

MAILED  
MAY 10 1943