

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Graham County, Sec. 22 Twp. 9 Rge. (E) 21 (W)

Location as "NE/CNW%SW%" or footage from lines 145' NE of Ctr. NE NW

Lease Owner Cities Service Oil Company

Lease Name Darnell Well No. 1

Office Address Box 553 Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 8-5 19 43

Application for plugging filed 10-2 19 68

Application for plugging approved 10-3 19 68


Plugging commenced 10-24 19 68

Plugging completed 10-24 19 68

Reason for abandonment of well or producing formation Non-economical

If a producing well is abandoned, date of last production 8-24 19 67

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

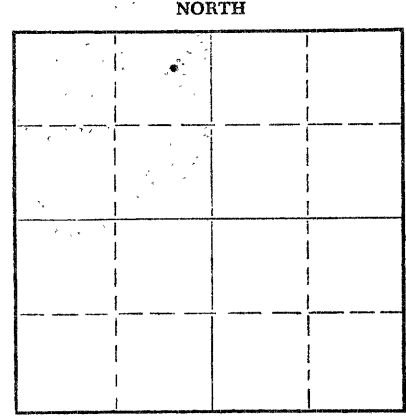

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. W. L. Nichols Morland, Kansas

Producing formation Arbuckle Depth to top 3792 Bottom 3794 Total Depth of Well 3794 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	156'	None
				5 1/2"	3792'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Ran 120 Jts. 2" tubing. Displaced 40 Sx. 50/50 Pozmix plus 6% Gel
from 3770 to 3450. Pulled tubing to 3400' Circulated in 25 Sx. Gel
to surface. Pulled tubing to 1025'. Spotted 45 Sx. 50/50 Pozmix
Pulled tubing to 180' Spotted 10 Sx. cement 180' Pulled tbg. to 30'
Filled casing to surface W/5 Sx. Cement Cut off casing and welded on cap.

RECEIVED
STATE CORPORATION COMMISSION
NOV 1 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Company
Address Hays, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

E. W. Peterman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *E. W. Peterman* Operations Supt.
Box 553 Russell, Kansas 67665

(Address)

Sworn to before me this 30th day of October, 19 68

10-5-72

James F. Kyger
James F. Kyger Notary Public.



Geol. 63 10M 6-43

WELL RECORD

Company Cities Service Oil Co. Well No. 1 Farm Darnell
 Location 1.45' NE of Center NW NW Sec. 22 T. 9 R. 21W
 Elevation 2300 County Graham State Kansas
 Initial Prod. Depthograph Potential: 3106 oil, no water, 2 1/2 hrs. Drilling Co. Hisson Drilling Co.
 Acid None Drig. Comm. July 14, 1943
 T. D. 3794' Drig. Comp. August 5, 1943

CASING RECORD:

8-5/8" @ 156' con. 125 sz Ash Grove
 con. & 125# C. C.
 5-1/2" @ 3792' con. 100 sz Ideal con.

FORMATION RECORD:

clay, shale & shells	0-156
shale & shells	250
shale	1069
shale, shells & sand	1553
sand	1700
shale & shells	2309
lime & shale	2455
shale & lime shells	2624
lime & shale	3168
broken lime	3205
lime	3227
lime & shale	3350
lime	3791
3791 Rot. TD = 3793 SLM	
dolomite	3794 T. D.

Corr. Top Arbuckle 3792' - 1492
 Penetration 2'
 Total Depth 3794'

Fillup: 200' oil in 15 mins.
 500' oil in 1/4 hr.
 1800' oil in 3 1/2 hrs.
 2800' oil in 9 hrs.

Syfo: 500' 0°
 1000' 0°
 1750' 0°
 2000' 0°
 2500' 0°
 3000' 0°
 3500' 0°

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 3 - 1965
 CONSERVATION DIVISION
 Wichita, Kansas

3404
 3373
 74