

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 22 Twp. 9 Rge. 21W (xx) (W)

Location as "NE/CNW&SWK" or footage from lines NE NW SE

Lease Owner Peel-Hardman Oil Operators

Lease Name Sutor "A" Well No. 2

Office Address R. R. # 3 Box 144-B Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) depleted Oil

Date well completed October 18, 19 51

Application for plugging filed January 14, 19 63

Application for plugging approved January 14, 19 63


Plugging commenced April 23, 19 63

Plugging completed April 23, 19 63

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes - W. L. Nichols

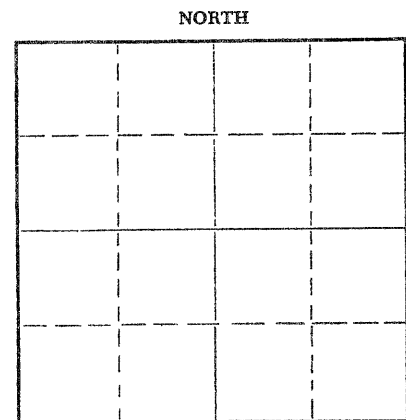

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3796' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<p>RECEIVED STATE CORPORATION COMMISSION 7/31/64 JUL 31 1964 CONSERVATION DIVISION Wichita, Kansas</p>						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

195' 8 5/8" Surface pipe, cement circulated.
3796' 5 1/2" Production casing.--Well had been squeezed from the Dakota sands, no attempt was made to recover production casing, Squeezed 5 1/2" casing with 40 sacks Halliburton gel mud followed with plug and 75 sacks Poz-Mix. Pump pressure at end of mixing Poz-Mix --300#. Final pressure after completion of plugging operations 100#.

Name of Plugging Contractor Halliburton Oil Well Cementing Co.
Address 410 Union Center Bldg. Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. William Herbert

(employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature] R. R. #3, Box 144B, Wichita, Kansas, 67220 (Address)

SUBSCRIBED AND SWORN to before me this 30th day of July, 19 64

My commission expires March 4, 1966 Marian M. Herbert Notary Public.


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY

Company- PEEL-HARDMAN PRODUCERS & R. W. SHIELDS SEC. 22 T. 9 R. 21W
Farm- Sutor "A" No. 2 NE NW SE

Total Depth. 3798
Comm. 10-9-51 Comp. 10-18-51
Shot or Treated.
Contractor. Peel-Hardman
Issued. 1-26-52

County Graham
KANSAS



Elevation. 2295

Production. Pot. 509

CASING:

8 5/8" 199' cem.
5 1/2" 3797' cem.

Figures Indicate Bottom of Formations.

surface soil	204
shale	770
sand	980
shale	1275
sand	1475
shale & shells	1745
anhydrite	1780
shale & shells	2625
lime & shale	2950
shale & shells	3265
shale & lime	3465
lime	3730
congl.	3780
lime	3798
Total Depth	

Scout Tops:

Heebner	3455
Lansing	3494
Base-Kansas City	3714
Simpson	3764
Arbuckle	3794

RECEIVED
STATE CORPORATION COMMISSION

JUL 27 1964

CONSERVATION DIVISION
Wichita, Kansas