


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

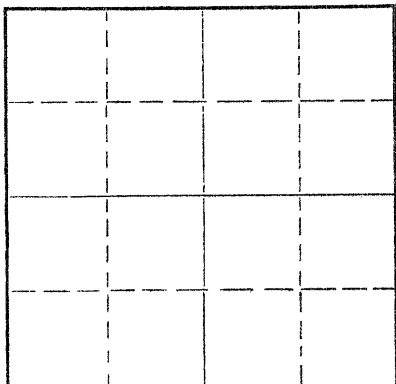

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines Graham County. Sec. 19 Twp. 9 Rge. 21 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NW SW
Lease Owner Burch Exploration, Inc.
Lease Name Van Loenen Well No. 2
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 2/10/67 _____ 19____
Plugging completed 2/12/67 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3890 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	220	none
				5 1/2	3885	1520

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Raised mast, cleaned cellar. Sanded hole to 3875' and set 5 sacks of cement. Rigged up on 5 1/2", shot pipe at 2485', 2005', 1800', 1600', 1500'. Pulled 20 joints. Finished pulling pipe. Set rock bridge at 225' and ran 3 yards of ready mix. Loaded trailer, racked unit and tallied pipe.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
2/16/67
FEB 16 1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
ROEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Roel J. Knight
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 15 day of Feb, 1967
John M. Dawson Notary Public.

My commission expires Oct 22-1970

WELL LOG

Burch Drilling Co. , Inc.
 #2 Van Loenen
 NW NW SW 19-9S-21W,
 Graham County, Kansas

comm: 11-20-57
 comp: 11-30-57
 Elevation: 2326 KB
 8 5/8" @ 220' with 165 ex.
 5 1/2" @ 3885' w/125 ex.
 Elevation: 2326 KB

220 Clay & Shale
 1325 Shale & Shells
 1830 Shale
 1870 Anhydrite
 3526 Shale & Lime
 3807 Lime
 3853 Lime Cherty
 3877 Cherty Lime & Shale
 3890 Cherty Lime

 3890 RTD

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 28 1966
 CONSERVATION DIVISION
 Wichita, Kansas

Tops:

Hoebner	3508
Toronto	3533
Lansing	3548
BKC	3760
Mazmaton	3818
Simpson shale	3862
Arbuckle	3878

DST #1 3585-3625 Open 1 hr.
 Rec. 15' slightly oil cut mud,
 45' muddy salt wtr. BHP 750#

DST #2 3683-3735 Open 1 hr.
 Rec. 30' mud. BHP 920#.

DST #3 3876-3890 Open 1 hr.
 Rec. 30' heavy oil & gas cut
 mud plus 1862' oil. BHP 1085#.

State of Kansas, County of Sedgwick:

I, Earl M. Burch, president of the Burch Drilling Co. , Inc. being first duly sworn on oath, state: That I have knowledge of the facts, statements and matters herein contained and that the same are true and correct.

Earl M. Burch

Subscribed and sworn to before me this 4th day of December, 1957.

My commission expires: 6-13-59.

Betty Sprague
 Notary Public

