

15-163-20414-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Rooks County, Sec. 11 Twp. 10 Rge. 19 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW NE SE
Lease Owner Shields Oil Producers, Inc.
Lease Name Husted Well No. 1
Office Address Shields Bldg., Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 2-2 1972
Application for plugging filed 2-2 1972
Application for plugging approved 2-2 1972
Plugging commenced 2-2 1972
Plugging completed 2-2 1972
Reason for abandonment of well or producing formation Dry hole

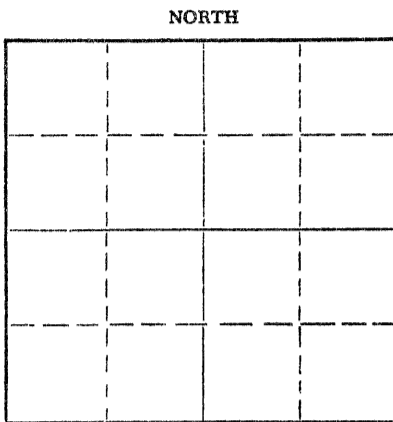

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3, 628 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	220'	Cmtd. w/150 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/ heavy mud
Push bridge plug to 660'
Spotted 70 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/ heavy mud
Push bridge plug to 220'
Spotted 20 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/ heavy mud
Push bridge plug to 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
FEB 25 1972
CONSERVATION DIVISION
Wichita, Kansas
02-25-1972

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas 67665

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
R. J. Shields (employee or owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *R. J. Shields*
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of February, 1972

My commission expires May 26, 1975
Kush Phillips
Notary Public.




15-163-20414-00-00
Shields

Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
Well: Husted #1
Commenced: January 25, 1972
Completed: February 2, 1972
Contractor: Shields Drilling Co., Inc.

Well Description: S^W NE SE
Sec. 11-10S-19W
Rooks County, Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	220'	Cmtd. w/150 sax

Elevation:
Treatment:
Production: D & A
Tops:

..... Figures Indicate Bottom of Formations

Surface soil & shale	680'
Shale & redbed	1,460'
Redbed	1,475'
Anhydrite	1,510'
Shale	1,660'
Shale & shells	2,000'
Shale & lime	3,245'
Lime	3,344'
Lime & shale	3,355'
Lime	3,628' RTD

RECEIVED
STATE CONSERVATION COMMISSION
FEB 25 1972
CONSERVATION DIVISION
Wichita, Kansas
02-25-1972

Notes