

State of Kansas




WM. H. AVERY Governor
WILLIAM L. MITCHELL Chairman
JAMES O. GREENLEAF Commissioner
HARRY G. WILES Commissioner
RAYMOND B. HARVEY Secretary
E. EDWARD JOHNSON Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

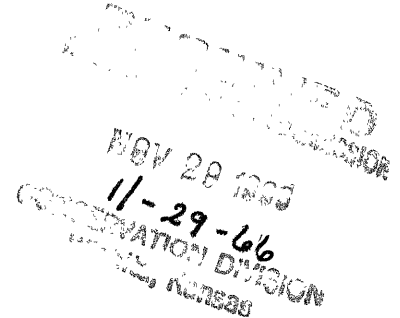

J. P. Roberts
Administrator
500 Insurance Building
Wichita 2, Kansas

Dear Sir:

Mr. Walker of Rains & Williamson Drlg. Inc has this date requested permission to plug the following described well:

Mr. Walker guarantees payment of the plugging fee.

Operator's full Name: Rains & Williamson Oil Co.

Complete Address: 1425 Wichita Plaza Wichita, Kansas

Lease Name: Stull Well No. 1

Location: NW NW SW Sec. 8 Twp. 9 Rge. 19 (E)(W) X

County Rooks Total Depth 3565' Oil Well

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Walker was instructed to plug the well as follows:

Gun pits, Circulate heavy mud, set cementing plug at 540' and displace
25 sc cement thru drill pipe Heavy mud to 220' set cementing plug and
displace 20 sc cement thru drill pipe Heavy mud to 40' set cementing plug,
1/2 sc hulls and 8 sc cement to base of cellar. Plug rat hole with 2 sc
cement.

Very truly yours,

Geo Messy
Conservation Division Agent