


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

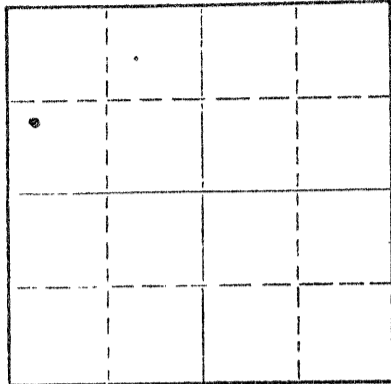

Locate well correctly on above
Section Plat

Rooks County, Sec. 12 Twp. 9 Rge. (E) 19 (W)
Location as "NE/CNW/SW" or footage from lines NW SW NW
Lease Owner Barnett Oil, Inc.
Lease Name Jelinek Well No. 1
Office Address 411 First National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil 67202
Date well completed May 14 19 50
Application for plugging filed Aug. 27 19 74
Application for plugging approved 19
Plugging commenced Oct. 10 19 74
Plugging completed Oct. 11 19 74
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3465 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			160'	8 5/8"	160'	none
			3461'	5 1/2"	3461'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 3420' and dumped 4 sacks of cement.

Pushed plug to 620' and sanded back to 600'. Plugged well with 4 yards of ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
OCT 17 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 128, Ellinwood, Kansas 67526
(If additional description is necessary, use BACK of this sheet)

STATE OF KANSAS, COUNTY OF BARTON, ss.
Evelyn Roth

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of October, 19 74

My commission expires _____

JENNY KASSELMAN
NOTARY PUBLIC
BARTON COUNTY, KANSAS
MY COMM. EXP. JULY 16, 1978


Jenny Kasselmann
Notary Public.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 E. Murdock, Wichita, Kansas

Company - HARBAR DRILLING CO.
Farm - Jelinek No. 1

SEC. 12 T. 9 R. 19W
NW SW NW

Total Depth. 3465
Comm. 4-27-50 Comp. 5-14-50
Shot or Treated.
Contractor.
Issued. 7-1-50

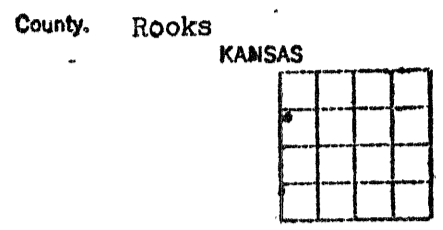

Production. Pmp. 162 oil /
5% wtr.

CASING:

8 5/8" surface 160' cem. w/175 sx.
5 1/2" 3461' cem. w/100 sx.

Figures indicate Bottom of Formations.

surface clay & sand	40
shale & shells	500
sand	590
shale & shells 2	725
sand	780
shale & sand	1070
redbed	1405
anhyd.	1440
redbed, shale & shells	1550
redbed & shale	1650
shale & shells	1865
shale & lime	3134
lime	3459
Arb. lime	3465
Total Depth	

Tops: Scout	
Anhyd.	1405
Lansing	3194
Arbuckle	3459

RECEIVED
STATE CORPORATION COMMISSION
8/28/74
AUG 28 1974
CONSERVATION COMMISSION
Wichita, Kansas.