


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

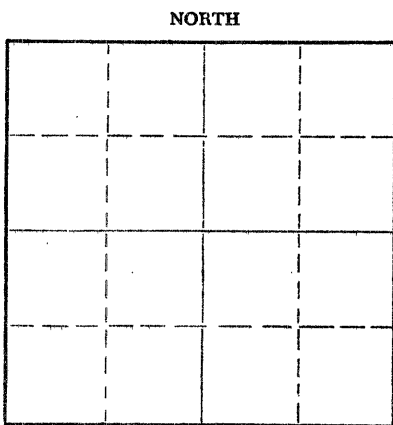

Graham County. Sec. 29 Twp. 9 Rge. 21 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE SE SE
Lease Owner American Petrofina Company of Texas
Lease Name Ford Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 2-24-64 19
Plugging completed 2-27-64 19
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 3915 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	255'	None
				5-1/2"	3911'	2464'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3915', sanded hole to 3900' and dumped 5 sacks of cement @ 3900' with dump bailer. Pulled 5 1/2" casing to 535' and circulated pipe with gel mud. Dumped 20 sacks of cement @ 535', pulled 5 1/2" casing to 240' and dumped 20 sacks of cement @ 240'. Pulled balance of 5 1/2" casing, bailed mud to 35', set rock bridge and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
3/3/64
MAR 3 1964

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss. Noel J. Knight (employee of owner) or (owner/contractor) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 29th day of February, 1964

My commission expires May 20, 1964 Milton J. Volin Notary Public.

