

15-163-20584-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Rooks County, Sec. 1 Twp. 9S Rge. (E) 19 (W)

Location as "NE/CNW/SW" or footage from lines C N/2 S/2 NE/4

Lease Owner Kansas Petroleum, Inc.

Lease Name DESBIEN Well No. #1

Office Address 500 Insurance Building, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 10, 1975

Application for plugging filed (verbally) October 10, 1975

Application for plugging approved (verbally) October 10, 1975


Plugging commenced October 10, 1975

Plugging completed October 10, 1975

Reason for abandonment of well or producing formation No commercial quantity of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

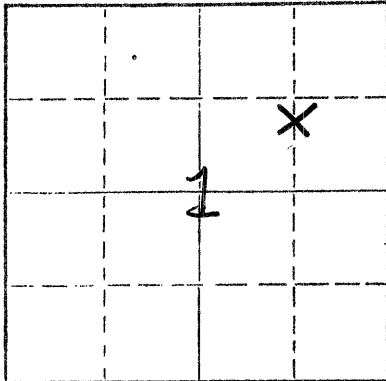

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3005' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	212.99	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st Plug Set @ 550' with 60 sx. cement
2nd Plug Set @ 185' with 20 sx. cement
3rd Plug Set @ 40' with 10 sx. cement
Plug was down @ 6:30 p.m. October 10, 1975

RECEIVED
STATE CORPORATION COMMISSION
10/15/75
OCT 15 1975
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet) Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jerry A. Langrehr-Exec. V.P.


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jerry A. Langrehr
801 Union Center, Wichita, Kansas (Address)

Subscribed and sworn to before me this 14th day of October, 1975

My commission expires July 21, 1979

Sandra Russell
Sandra Russell Notary Public.



CONTRACTOR'S WELL LOG

OPERATOR:	Kansas Petroleum, Inc.
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	DESBIEN #1
LOCATION:	C N/2 S/2 NE/4 Sec. 1-9S-19W Rooks County, Kansas
GEOLOGIST:	Dick Roby
SPUD DATE:	October 7, 1975
COMPLETION DATE:	October 10, 1975

0	220	Clay and Sand
220	246	Sand and Shale
246	900	Shale
900	1150	Sand
1150	1415	Shale
1415	1456	Anhydrite
1456	2300	Shale
2300	2913	Shale & Lime
2913	3005	Lime & Shale
	3005	Rotary Total Depth

Cut 220' of 12 1/4" hole. Ran 5 jts. 25#, 8 5/8" surface casing with welded collar. Set @212.99 K.B. Cemented with 165 sx. Quick-Set cement. Cement circulated. Plug was down @ 4:45 p.m. October 7, 1975. Drilled plug @ 10:45 p.m. October 7, 1975.

Plugged and Abandoned: 1st Plug Set @ 550' with 60 sx. cement; 2nd Plug Set @ 185' with 20 sx. cement; 3rd Plug Set @ 40' with 10 sx. cement. State Plugger: Leo Massey. Plug was down @ 6:30 p.m. October 10, 1975.

RECEIVED
STATE COMPLETION COMMISSION
10/15/75
OCT 15 1975
CONSERVATION DIVISION
Wichita, Kansas

SAMPLE TOPS:
Anhydrite 1415'
B/Anhydrite 1456'

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)


Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the DESBIEN #1, C N/2 S/2 NE/4, Section 1-9S-19W, Rooks County, Kansas.

ABERCROMBIE DRILLING, INC.

By: Jerry A. Langrehr
Jerry A. Langrehr-Exec. V.P.

Subscribed and sworn to before me a Notary Public, in and for the aforesaid county and state as of this 14th day of October, 1975.

Sandra Russell
Sandra Russell - Notary Public



My Commission Expires: July 21, 1979