

WELL PLUGGING RECORD


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH



Locate well correctly on above
Section Plat

Rooks County. Sec. 9 Twp. 9 Rge. (E) 19 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE SE SW

Lease Owner The Phil-Han Oil Company

Lease Name McClellan Well No. 2

Office Address 1407 Union National Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed November 14, 1946 1946

Application for plugging filed " 1946

Application for plugging approved " 1946

Plugging commenced " 1946

Plugging completed " 1946

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 1946

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Kerr

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3615 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	1268'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with mud from 3615, bridged hole at 250' and
cemented with 15 sacks. Bridged at 40' and cemented
with 5 sacks.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Phil-Han Oil Company

Address 1407 Union National Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

L. E. Phillips, Jr. (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. E. Phillips, Jr.

(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of November 1946

Will A. Stenberg
Notary Public.

My commission expires October 4, 1949.

WELL LOG

The Phil-Han Oil Company
#2 McCLELLAN

SE SE SW Section 9-9-19W
Rooks County, Kansas

Comm: 10-25-46
Comp: 11-14-46

Elevation - 2088'

shale & sand	210
shale	840
shells & shale	985
sand	1225
sand & red bed	1268
red rock	1492
anhydrite	1540
lime, shale & shells	1625
shale & red rock	1800
salt & shale	2015
shale & lime	2510
lime	2740
shale & lime	2825
shale & shells	2925
shale & lime	2945
lime	3210
shale & lime	3340
lime	3564
conglomerate	3567
arbuckle lime	3615

T.D.

CASING RECORD:

8 5/8" Surface casing at 1268' &
cemented with 650 sacks.

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

We hereby affirm that the above and foregoing is a true and correct copy of the log on the #2 McClellan, located in the SE SE SW of Section 9-9-19W, Rooks County, Kansas.


THE PHIL-HAN OIL COMPANY

By *L. Phillip Jr.*

Subscribed and sworn to before me, this 19th day of November, 1946.

Walter G. Steiner
Notary Public

My commission expires Oct. 4, 1949.

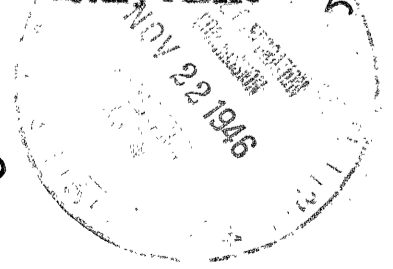

9 9 19W
82 7