


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

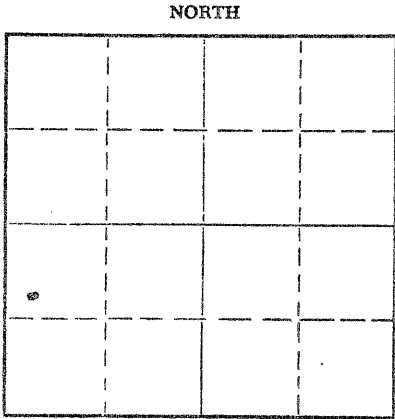

Locate well correctly on above
Section Plat

Rooks County. Sec. 2 Twp. 9 Rge. (E) 19 (W)
Location as "NE/CNWxSWx" or footage from lines SW NW SW
Lease Owner Continental Oil Company
Lease Name Barry Well No. 638
Office Address Box 267, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced December 28 1971
Plugging completed December 30 1971
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3517 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	200'	10 3/4"	200'	none
		0	3504'	6"	3504'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 3200' and dumped 6 sacks of cement.

Pumped in 5 sacks of hulls, 15 sacks of gel and 100 sacks of cement. Stop plug at 500'. Pump in 125 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
JAN 5 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss. Evelyn Roth
(employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of January, 1972

My commission expires Feb. 10, 1975
George A. Meyer Notary Public.

WELL LOG

15-163-23024-00-00

Continental Oil Company

Dan Barry B Well No. 8
Dan Barry B 8

Described as your Dan Barry B Well No. 8
located in Section 2, Township 9 South,
Range 19 West, Rooks County, Kansas.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Shale & Rock	0	224
Shale & Sand	224	709
Shale & Shells	709	1185
Shale & Shells	1185	1472
Anhydrite	1472	1510
Shale & Sand	1510	1623
Shale & Shells	1623	1723
Shale & Shells	1723	1955
Lime & Shale	1955	2038
Shale & Shells	2038	2105
Lime, shale & iron	2105	2155
Lime & Shale	2155	2290
Lime, shale, iron	2290	2321
Lime & Shale	2321	2385
Lime & Shale	2385	3051
Lime	3051	3100
Lime & Shale	3100	3162
Lime	3162	3495
Lime & Shale	3495	3497
Lime	3497	3517

Lansing lime topped 3235'
 Arbuckle lime topped 3483'
 Total depth 3517'

Copy to Prod Dept 7-22-48

RECEIVED
 STATE CORPORATION COMMISSION
 10/28/71
 OCT 28 1971
 CONSERVATION DIVISION
 Wichita, Kansas

