

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-20854-00-00
Spot: SESE Sec/Twnshp/Rge: 8-31S-18W
330 feet from S Section Line, 330 feet from E Section Line
Lease Name: THOMPSON Well #: 1-8
County: COMANCHE Total Vertical Depth: 5200 feet

Operator License No.: 5420
Op Name: WHITE & ELLIS DRILLING, INC.
Address: PO BOX 48848
WICHITA, KS 67201

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5033		WITH 2 SX CMT
PROD	4.5	5199	0	WITH 126 SX CMT
SURF	8.625	318		WITH 250 SX CMT

169.00

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/27/2007 9:30 AM
Plug Co. License No.: 6454 Plug Co. Name: CHEYENNE WELL SERVICE, INC.
Proposal Rcvd. from: DALLAS FLOWERS Company: FLOWERS PRODUCTION CO. Phone: (316) 321-0550

Proposed Plugging Method: SET CAST IRON BRIDGE PLUG @ 5033. DUMP TWO SX CEMENT ON PLUG. SHOOT OFF 4 1/2 CASING. PULL UP TO 1000' CEMENT ANHYDRITE. POH W/ 4 1/2 RIH W/ 2/38 TUBING. CEMENT @ 325' W/ 50 SX CEMENT. POH W TUBING TO 60' CEMENT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/27/2007 4:30 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

SET CIBP @ 5033' WITH 2 SX CMT WITH DUMP BAILER. PERFORATE CASING AT 1000'. RUN TUBING IN HOLE. PUMP 70 SX CMT. FLUID TO SURFACE. PERFORATE CASING AT 330'. PUMP 60 SX CMT THROUGH CASING. NO RETURNS. CASING ON VACUUM. FLUSHED TOP PLUG WITH WATER, CHECKED BOTTOM PLUG WITH WIRELINE. TOC @ 800'. WAITED 1 1/2 HOURS. RETRIED PLUG AT 330'. PUMPED 220 SX CMT WITH CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
5083	5088		

INVOICED
DATE 10/16/07
INV. NO. 2008060596

Remarks: USED 60/40 POZMIX 4% GEL BY GRESSEL OIL FIELD SERVICES.

Plugged through: CSG

District: 01

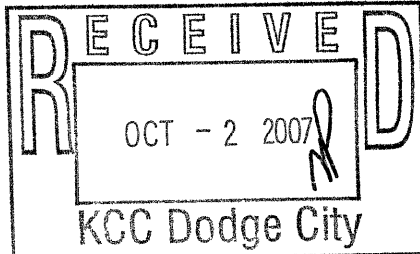

Signed

Jerry W. Stapleton
(TECHNICIAN)
PART II

RECEIVED
KANSAS CORPORATION COMMISSION

OCT 09 2007

CONSERVATION DIVISION
WICHITA, KS

Form CP-2/3

PKT
SD