

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20931-00-00
Spot: W2SWSW Sec/Twnshp/Rge: 35-21S-15W
660 feet from S Section Line, 330 feet from W Section Line
Lease Name: KELLER Well #: 2
County: PAWNEE Total Vertical Depth: 3917 feet

Operator License No.: 30705
Op Name: YOUNGER ENERGY COMPANY
Address: 453 S WEBB RD STE 100
WICHITA, KS 67207

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3916	2050	WITH 150 SX CMT
SURF	8.625	653		WITH 425 SX CMT

127.30

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/28/2007 12:30 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: PERF 4 1/2" CASING @ 630', CIRCULATE CEMENT TO SURFACE WITH 600 SXS 60/40 POZMIX 6% GEL (PER Steve Durant- KCC 12-23-2006.

Plugging Proposal Received By: STEVE DURRANT
Date/Time Plugging Completed: 09/28/2001 1:50 PM

Witness Type: COMPLETE (100%)
KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

UNSEATED BRIDGE PLUG CEMENTED IN DURING SQUEEZE OPERATION. TOC @ 2572'. CASING PRESSURED TO 250#. HELD OK. 1ST PLUG AT 850' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 640' WITH 50 SX CMT. 3RD PLUG AT 280' WITH 20 SX CMT. 4TH PLUG AT 40' WITH 15 SX CMT. CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
3910	3912		
2664	3111		

INVOICED
DATE 10/16/07
INV. NO. 2008060598

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY CEMENTING.

Plugged through: CSG

District: 01

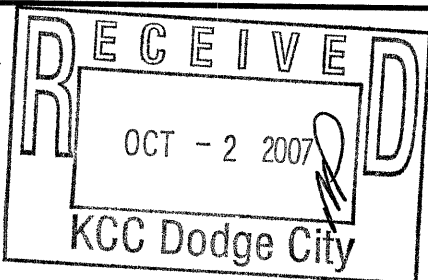

Signed _____

Jerry W. Stapleton
(TECHNICIAN)
PART II

RECEIVED
KANSAS CORPORATION COMMISSION
Form CP-2/3

OCT 09 2007

CONSERVATION DIVISION
WICHITA, KS

PKT
[Signature]