

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-21147-00-00
Spot: NWNWNE Sec/Twnshp/Rge: 30-16S-16W
330 feet from N Section Line, 2310 feet from E Section Line
Lease Name: OCHS Well #: 3
County: RUSH Total Vertical Depth: 3585 feet

Operator License No.: 32278
Op Name: TENGASCO, INC.
Address: 1327 NOOSE RD PO BOX 458
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3584	0	WITH 275 SX CMT
SURF	8.625	1102		WITH 400 SX CMT

116.51

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/11/2007 8:30 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: GARY WAGNER Company: TENGASCO Phone: (865) 675-1554

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: RICHARD LACEY Witness Type: PARTIAL
Date/Time Plugging Completed: 10/11/2007 11:30 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

7 JOINTS OF TUBING ON BOTTOM OF HOLE. TUBING FISH @ 3328'. RUN TUBING TO 3290' & PUMPED 200# HULLS - 25 SX CMT. PERFORATED 4 1/2" @ 1130'. PULLED TUBING TO 1160'. PUMPED 250 SX CMT WITH 200# HULLS DOWN TUBING. CIRCULATED CMT TO SURFACE UP 4 1/2" & 8 5/8" X 4 1/2" ANNULUS. PULLED TUBING. TOPPED OFF HOLE WITH 25 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3537	3543		
3420	3426		
3362	3367		
3305	3309		
3282	3285		
3248	3254		

INVOICED
DATE 10/22/07
INV. NO. 2008 060645

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

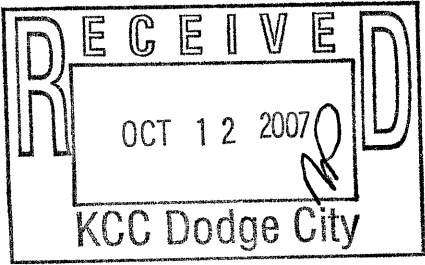

Signed Richard W. Lacey

(TECHNICIAN)
RECEIVED
KANSAS CORPORATION COMMISSION

OCT 18 2007
CONSERVATION DIVISION
WICHITA, KS

Form CP-2/3
Ab
Pkt