

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-10309-00-00
Spot: NW Sec/Twnshp/Rge: 20-33S-13W
1320 feet from N Section Line, 1320 feet from W Section Line
Lease Name: WILSON ESTATE Well #: 2
County: BARBER Total Vertical Depth: 4652 feet

Operator License No.: 3273
Op Name: LOEB, HERMAN L.
Address: PO BOX 524
LAWRENCEVILLE, IL 62439

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4500		WITH 4 SX CMT
PROD 7		4623	0	WITH 550 SX CMT
SURF 10		319		WITH 260 SX CMT

\$151.19

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/28/2007 2:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: ALNA VRATIL Company: HERMAN LOEB Phone: (618) 943-2227

Proposed Plugging Method: CIBP @ 4500'. TEST CASING TO 300#. PERFORATE AT 700' & CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 10/01/2007 3:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

BAKER MODEL "R"-3 PACKER & 2 JOINTS 3 1/2" TUBING LOST IN HOLE ON 4/11/80. FISH ON BOTTOM. SET CIBP @ 4500' & PUT 4 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. PERFORATE 7" CASING AT 700'. PUMP DOWN 7" CASING WITH 400 SX CMT. NEVER ESTABLISHED ANY RETURNS. PUMPING PRESSURE 600#-700# AT 3 1/2 BBLs PER MINUTE. PUMPED 12 BBLs WATER TO DISPLACE CMT IN 7" CASING TO 300'. 10/1/07: TAG CMT TOP IN 7" AT 280'. PERFORATE @ 200'. PUMPED DOWN 7" CASING WITH 120 SX CMT. CMT CIRCULATED.

Perfs:


Top	Bot	Thru	Comments
4623	4652	OH	

INVOICED
DATE 10/15/07
INV. NO. 2008060577

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

District: 01

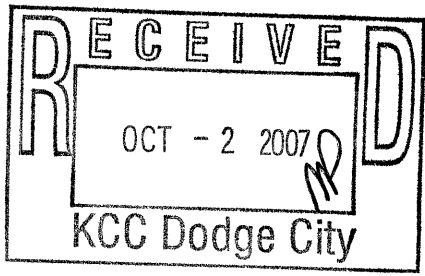

Signed Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION
Form CP-2/3

OCT 09 2007

CONSERVATION DIVISION
WICHITA, KS

PKT