

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-21560-00-00
Spot: NENE Sec/Twnshp/Rge: 7-23S-16W
4620 feet from S Section Line, 660 feet from E Section Line
Lease Name: SCHARTZ Well #: 5A-7
County: PAWNEE Total Vertical Depth: 4367 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PKWY
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4367	2240	WITH 125 SX CMT
SURF	8.625	509		

141.93

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 09/27/2007 11:30 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SANDED TO 4087' & 4 SX CMT. PLUG AT 1100' WITH 15 SX GEL & 50 SX CMT. PLUG AT 530' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/27/2007 12:30 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 4087' & 4 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 1100' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 530' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4162	4168		

INVOICED
DATE 10/15/07
INV. NO. 2008060583

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY CEMENTING.

Plugged through: CSG

District: 01

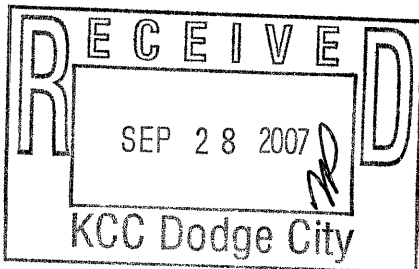

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED
KANSAS CORPORATION COMMISSION

OCT 09 2007
CONSERVATION DIVISION
WICHITA, KS

Form CP-2/3

Handwritten initials/signature