

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-19011-00-00  
Spot: NWNE Sec/Twnshp/Rge: 25-19S-22W  
660 feet from N Section Line, 1980 feet from E Section Line  
Lease Name: BORGER Well #: 2  
County: NESS Total Vertical Depth: 4344 feet

Operator License No.: 4058  
Op Name: AMERICAN WARRIOR, INC.  
Address: PO BOX 399  
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4250		WITH 2 SX CMT
PROD	5.5	4384	0	WITH 100 SX CMT
SURF	8.625	409		WITH 275 SX CMT

\$ 141.18

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/21/2007 4:00 PM  
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.  
Proposal Rcvd. from: SCOTT CORSAIR Company: AMERICAN WARRIOIE Phone: (785) 398-2270

Proposed Plugging Method: SET CIBP @ 2 SX CMT. IF CASING IS PULLED SPOT PLUG AT 750' WITH 80 SX CMT. PULL CASING TO 410' & 50 SX CMT. PULL CASING TO 40' & 10 SX CMT. IF CASING CAN'T BE PULLED, SET CIBP & THEN PERFORATE AT 750'. PUMP CASING VOLUME PLUS 80 SX CMT. THEN PUMP DOWN BACKSIDE WITH 120 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 09/21/2007 5:10 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:


SET CIBP @ 4250' & 2 SX CMT. PERFORATE AT 750' & PUMP 155 SX CMT. MAXIMUM PRESSURE 700#. SHUT IN PRESSURE 425#. DID NOT CIRCULATE. TIED ONTO BACKSIDE AND PUMPED 45 SX CMT. PRESSURED TO 350# & HELD.

Perfs:

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

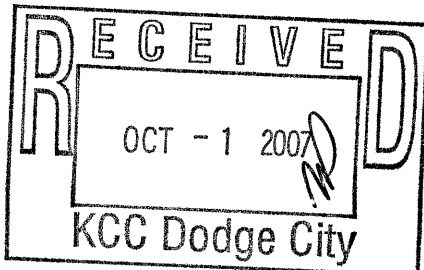

Signed

*Michael Maier*

(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION Form CP-2/3

OCT 15 2007

CONSERVATION DIVISION  
WICHITA, KS