

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-22046-00-00  
Spot: NWSENWSE Sec/Twnshp/Rge: 17-19S-30W  
1900 feet from S Section Line, 1900 feet from E Section Line  
Lease Name: NEELEY Well #: 1-17  
County: LANE Total Vertical Depth: 4640 feet

Operator License No.: 3842  
Op Name: LARSON ENGINEERING, INC. DBA LAR  
Address: 562 W STATE RD 4  
OLMITZ, KS 67564

String Size Depth (ft) Pulled (ft) Comments  
SURF 8.625 257

150.80

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/06/2007 2:00 AM

Plug Co. License No.: 33935 Plug Co. Name: H. D. DRILLING, LLC

Proposal Rcvd. from: DOUG ROBERTS Company: H. D. DRILLING, LLC Phone: (785) 222-3010

Proposed Plugging Method: 1ST PLUG AT 2250' WITH 50 SX CMT. 2ND PLUG AT 1480' WITH 80 SX CMT. 3RD PLUG AT 700' WITH 50 SX CMT. 4TH PLUG AT 290' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: RICHARD LACEY

WitnessType: NONE

Date/Time Plugging Completed: 10/06/2007 4:00 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

Perfs:


1ST PLUG AT 2250' WITH 50 SX CMT. 2ND PLUG AT 1480' WITH 80 SX CMT. 3RD PLUG AT 700' WITH 50 SX CMT. 4TH PLUG AT 290' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED

Plugged through: DP

INVOICED  
DATE 10/18/07  
INV. NO. 2008060602

District: 01

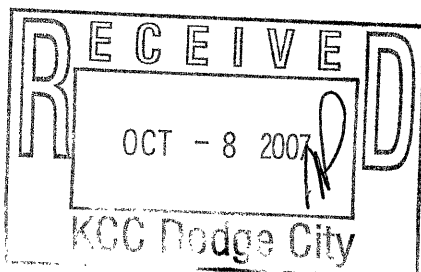

Signed

Richard W. Lacey

(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION Form CP-2/3

OCT 15 2007

CONSERVATION DIVISION  
WICHITA, KS

*[Handwritten initials]*