


15-163-03991-00-01
 STATE OF KANSAS
 STATE CORPORATION COMMISSION
 200 Colorado Derby Bldg.
 Wichita, Kansas 67202

Form CP-4
 Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
 Make Required Affidavit

COUNTY Rooks SEC. 11 TWP. 9 RGE. 16 XE/W
 Location as in quarters or footage from lines:
C-N/2 NE-SW

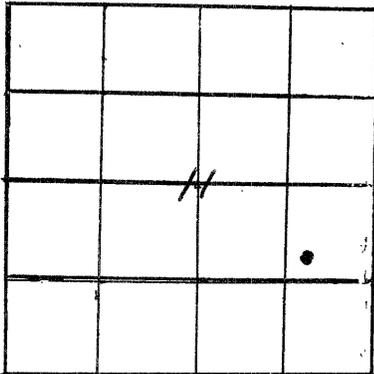

Locate Well
 correctly on above
 Section Platt.

Lease Owner Harold Krueger Co.
 Lease Name Tatkenhorst C Well No. 2
 Office Address P.O. Box 247, Natoma, Kansas 67651
 Character of Well (Completed as Oil, Gas or Dry Hole): EOR *see NR*
 Date Well Completed 5-14-49
 Application for plugging filed 4-27-83
 Plugging commenced 5-4-83
 Plugging completed 5-4-83
 Reason for abandonment of well or producing formation Could no longer use as input well.

Was permission obtained from the Conservation Division or it's
 Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Dennis Hamel
 Producing formation KC Lime Depth to top _____ bottom _____ T.D. 3230
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
KC Lime				5 1/2		None

Describe in detail the manner in which the well was plugged, indicating where the mud
 fluid was placed and the method or methods used in introducing it into the hold. If cement
 or other plugs were used, state the character of same and depth placed, from _____ feet
 to _____ feet for each plug set.

Mixed 250 sks. cement with 4 sks. of hulls for bottom. Released plug and
displaced to 800 ft. Stopped pumping. Had 200 PSI standing pressure. Shut in.
Perforated at 750 ft. Could not pump in with 500 PSI standing on it. Perforated
at 300 ft. Mixed another 250 sks. 50/50 pox. with additives and circulated to
surface. Cement standing full in cellar. Shut in at head. Job complete.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton, Hays, Kansas

STATE OF KANSAS COUNTY OF OSBORNE, ss.
Dean Wineland (employee of owner) ~~or (owner or operator)~~ of the
 above-described well, being first duly sworn on oath, says: That I have knowledge of the
 facts, statements, and matters herein contained and the log of the above-described well as
 filed and that the same are true and correct. So help me God.

(Signature) Dean Wineland
Natoma, Kansas 67651
 (Address)

SUBSCRIBED AND SWORN TO before me this 12th day of May, 19 83

Della M. Richmond
 Notary Public.

My Commission expires: 7-12-84 RECEIVED
 STATE CORPORATION COMMISSION

MAY 13 1983

CONSERVATION DIVISION
 Wichita, Kansas

DELLA M. RICHMOND
 STATE NOTARY PUBLIC
 OSBORNE COUNTY, KANSAS
 My Appt. Exp. _____