


15-163-63944-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

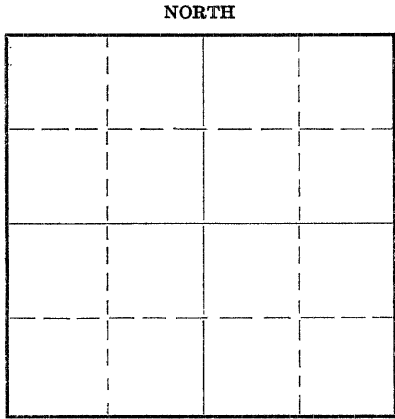

Locate well correctly on above  
Section Plat

Rooks County. Sec. 24 Twp. 9 Rge. 16 (X) W (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW NE NW  
Lease Owner The Vickers Petroleum Co., Inc.  
Lease Name Rathbun Well No. 1  
Office Address 201 W-K-H Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed December 3 1949  
Application for plugging filed December 4 1949  
Application for plugging approved December 4 1949  
Plugging commenced December 5 1949  
Plugging completed December 11 1949  
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19...  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas  
Producing formation Lansing Depth to top 3260 Bottom Total Depth of Well 3480 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	105'	None
				5-1/2"	3480'	2004

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from... feet to ... feet for each plug set.

P.B. 3480 to 3400 w/sand. Dump 5 sx cement at 3400' w/dump bailer. Mudded 3365' to 150'. Set rock bridge @ 150', dump 15 sx cement. Filled w/mud to 30'. Dumped 10 sx cement for cap.

RECEIVED

12-17-49

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Vickers Petroleum Co., Inc.  
Address 201 W-K-H Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. John M. Little (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John M. Little  
201 W-K-H Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 16th day of December, 1949

Allen P. Denton Notary Public

My commission expires August 13, 1953

22-5133-s 9-48-10M

PLUGGING  
FILE SEC 24 T 9 R 16 W  
BOOK PAGE 130 LINE 14

## The Vickers Petroleum Co., Inc.

Rathbun Well #1  
SW NE NW Sec. 24-9S-16W  
Rooks County, Kansas

Casing Record:  
8-5/8" @ 105' w/50 sx  
5-1/2" @ 3480 w/75 sx

Commenced: November 8, 1949  
Completed: December 3, 1949

Elevation: 2082 R.B.  
Potential: D & A

## L O G

Surface	0-104
Rock	104-140
Blue Shale	140-390
Shale & Sand	390-410
Sand & Shale	410-980
Red Bed	980-1000
Red Bed & Shale	1000-1280
Anhydrite	1280-1320
Shale & Shells	1320-1635
Shale, Shells, Salt	1635-1780
Lime Broken	1780-2215
Lime	2215-2315
Lime Broken	2315-2465
Lime & Shale	2465-2575
Shale & Lime	2575-2991
Lime & Shale	2991-3480 R.T.D.
Ran Gamma Ray	2900-3470
Perforate 12 shts.	3422-3431
12 shts.	3431-3440
12 shts.	3446-3454
12 shts.	3454-3462
8 shts.	3448-3454
S.S.O.	3448-3452
F.U. 40' fluid S.S.O. in 14 hrs.	
Acidized w/1000 gal.	
F.U. 240' fl (30' oil + 210' wat) after 14 hrs.	
Tops:	
Topeka	2991
Heebner	3221
Toronto	3241
Lansing	3260
Soft spots 3184-3193; 3364-3371; 3425-3430;	
3439-3442; 3447-3453 S.O.; 3456-3461 S.S.O.	

I hereby certify that this log is true and correct to the best of my knowledge and belief.

THE VICKERS PETROLEUM CO., INC.

By

*H. C. Davis*

Sworn and subscribed to before me this 7th day of December, 1949.

12-17-49

*Allen J. Denton*  
Notary Public

My commission expires Aug. 13, 1953.

