


15-163-02940-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Rooks County, Sec. 2 Twp. 9 Rge. 17 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines Sw. 1/4, Sw.1/4, Se.1/4
Lease Owner Harbar Drilling Co. Etal
Lease Name Baxa Well No. 1
Office Address 1019 Central Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Rotary Dry Hole
Date well completed 2/23/49 19
Application for plugging filed 2/23/49 19
Application for plugging approved 2/23/49 Verbal 19
Plugging commenced 2/23/49 19
Plugging completed 2/23/49 19
Reason for abandonment of well or producing formation Dry Hole

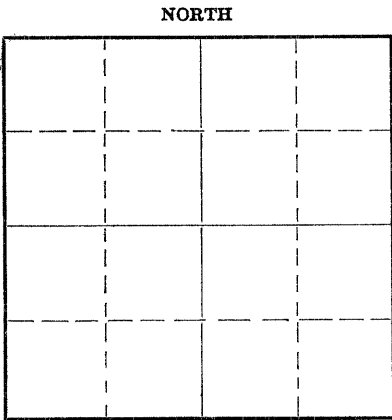

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production X 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Peddy
Producing formation None Depth to top X Bottom X Total Depth of Well 3470 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface sands & shale	Dry	0	100'	8 5/8"	96'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from T.D. (3470) back to 100' of top and set a wooden plug and dumped 15 sx. cement on top same then put rotary mud on top cement back to 20' of top set anothe wooden plug and dumped 10 sx. cement on top same filling top surface pipe and bottom cellar.

3/1/49
RECEIVED
STATE CORPORATION COMMISSION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Harbar Drilling Co.,
Address 1019 Central Bldg. Wichita Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
I H. L. King (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

H. L. King

SUBSCRIBED AND SWORN to before me this 24th day of February, 1949

(Address)

Ray Gillig
Notary Public.

My commission expires

9-4-50
PLUGGING
FILE SEC 2 T 9 R 17
TOP 85

15-163-02940-0000

BAZA #1

SW 1/4 SW 1/4 SE 1/4 Section 2-9-17E, Rooks County, Kansas

Rigging up Rotary Tools
Tearing out Rotary Tools

2-11-49
~~2-21-49~~
2-23-49
KCC
ZAP

Run 5 Jts. 96' of 8 5/8" surface pipe.
Cemented with 60 sz. cement.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Sand and gravel	0	25
Shale	25	100
Sand and shale	100	750
Sand	750	900
Sand and shale	900	1065
Red Bed Shale	1065	1220
Anhydrite	1220	1255
Shale and sand	1255	1455
Redbed-salt	1455	1575
Salt	1575	1680
Shells and shale	1680	1740
Shale	1740	1930
Shale and lime	1930	2268
Shale	2268	2410
Lime and shale	2410	3055
Lime	3055	3100
Lime and shale	3100	3135
Lime	3135	3190
Lime and shale	3190	3260
Lime	3260	3470 Total Depth

I, Don S. Packer, hereby certify that the above Log is true and correct, to the best of my knowledge and belief.

Don S. Packer

Subscribed and sworn to before me this 28th day of February, 1949.

Walter Kelly
Notary Public

My commission expires: March 22, 1952.

3/1/49
RECEIVED
MAR 7 - 1949
ST. LOUIS DIVISION

PLUGGING
FILE SEC. 2-9-17E
85 5