

15-163-20390-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

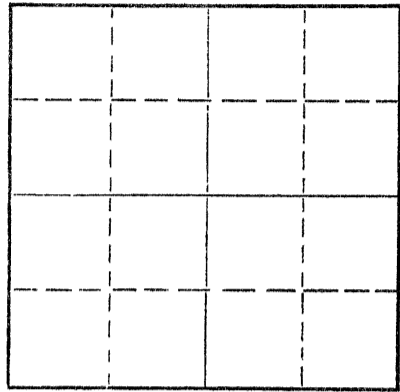

Locate well correctly on above
Section Plat

Rooks County. Sec. 27 Twp. 9 Rge. 16 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW SW SE
Lease Owner Black Petroleum, Inc.
Lease Name Becker Well No. 1
Office Address Suite 445 Garvey Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 8-31 19 71
Application for plugging filed 8-31 19 71
Application for plugging approved 8-31 19 71
Plugging commenced 8-31 19 71
Plugging completed 8-31 19 71
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3,625 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	224'	Cmtd. w/145 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/heavy mud
Set bridge plug @ 720'
Pump 70 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Set bridge plug @ 210'
Pump 20 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Set bridge plug @ 40' w/1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
SEP 10 1971
CONSERVATION DIVISION
Wichita, Kansas

9-10-71

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss. R. J. Shields, contractor

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Shields
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of September, 1971

My commission expires May 26, 1975
Rush Phillips
Notary Public.




Shields

WELL LOG

15-163-20390⁰⁰⁻⁰⁰ Russell, Kansas

Operator: Black Petroleum, Inc.
 Well: Becker #1
 Commenced: August 22, 1971
 Completed: August 31, 1971
 Contractor: Shields Drilling Co., Inc.

Well Description: SW SW SE
 Sec. 27-9S-16W
 Rooks County, Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	224'	Cmtd. w/145 sax

Elevation: 2,004' R. B.
 Treatment:
 Production: D & A
 Tops:

..... Figures Indicate Bottom of Formations

Rock & Shale	110'
Shale	225'
Shale & Sand	710'
Redbed	860'
Shale & Sand	1,205'
Anhydrite	1,237'
Shale, Salt & Shells	1,650'
Shale & Shells	1,940'
Shale & Lime	3,015'
Lime	3,108'
Lime & Shale	3,185'
Lime	3,430'
Lime & Chert	3,515'
Conglomerate & Chert	3,625' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 10 1971
 CONSERVATION DIVISION
 Wichita, Kansas

9-10-71

Notes