


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

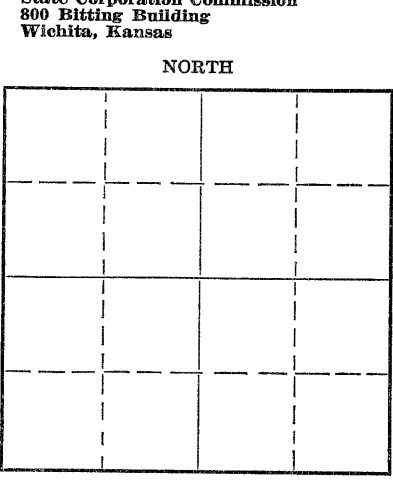

Locate well correctly on above Section Plat

Rooks County, Sec. 6 Twp. 9 Rge. 17W (E) (W)
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines CE $\frac{1}{2}$ SE SE
Lease Owner West Supply Company
Lease Name Moos Well No. 1
Office Address Chase, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 3-25-42 19
Application for plugging filed 5-24-52 19
Application for plugging approved 5-22-52 19
Plugging commenced 5-12-52 19
Plugging completed 5-18-52 19
Reason for abandonment of well or producing formation Ceased production

If a producing well is abandoned, date of last production September 19 51
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Arbuckle Lime Depth to top 3391' Bottom 13' Total Depth of Well 3406' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 92' | None |
| | | | | 4-1/2" | 3391' | 705' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Lane Wells plug set at 2945' and well perforated at 2925'. Sanded hole from 2945' to 2920' and ran 5 sacks of cement. Bailed hole and mudded hole to 150'. Set 10' rock bridge and ran 15 sacks of cement. Mudded hole to 40' and ran 10 sacks of cement on top. Plugging completed.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor West Supply Company
Address Chase, Kansas

STATE OF Kansas COUNTY OF Rice, SS.
E. E. O'Brien (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. O'Brien
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 26 day of May, 1952

My commission expires 3/1/55
Orlando WED Notary Public.

23-3890-6-51-20M
PLUGGING
FILE SEC 26 T 9 R 17W
BOOK PAGE 18 LINE 5

MAY 23 1952
CONSERVATION DIVISION
Wichita, Kansas

5/26/52