


15-163 - 00375-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

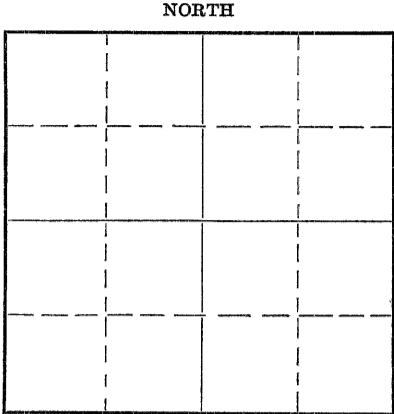

Locate well correctly on above
Section Plat

Rooks _____ County. Sec. 18 Twp. 9 Rge. 17 (E) (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NW SE
Lease Owner Dizdar Petroleum Investment Company
Lease Name Green Well No. 1
Office Address 1201 Main Street, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 22 19 51
Application for plugging filed December 22 19 51
Application for plugging approved December 22 19 51
Plugging commenced December 22 19 51
Plugging completed December 22 19 51
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3612 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	102	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Pushed plug to 100', dumped 1/2 sack hulls on plug, mixed 15 sacks of cement through drill pipe, filled hole to 40', pushed plug to 40', dumped 1/2 sack hulls on plug, mixed 10 sacks of cement and filled hole to bottom of cellar.

RECEIVED
01-09-1952
JAN 7 1952

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Dizdar & Nye Drilling Company
Address Drawer 30, Hays, Kansas

STATE OF Kansas, COUNTY OF Ellis, ss.
~~Witness~~ Claude N. Bard (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Claude N. Bard
Drawer 30, Hays, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 31st day of December, 1951

My commission expires May 9, 1952
John L. Spiess Notary Public.

PLUGGING
FILE NO 119 120
DATE 12 31 51

Company: Dizdar Petroleum Investment Company
Contractor: Dizdar & Nye Drilling Company
Commenced: December 8, 1951
Completed: December 22, 1951

Farm: Green No. 1
Location: NE NW SE 18-9-17
Rooks County, Kansas
Casing Record: 8 5/8" set at 102'
Elevation 2009 DF
Dry and Abandoned

(Figures below indicate bottoms)

clay & sand	40		
blue shale	102		
shale & sand	145		
sandy shale & shells	670		
red bed	810		
shale & sand	1070		
sand & shale	1125		
anhydrite	1160		
shale & shells	1385		
lime	1412		
shale & shells	1615		
shale & shells	1845		
shale & shells	1945		
lime & shale	2040		
shale & lime	2145		
lime & shale	2230		
lime & shale	2290		
lime & shale	2395		
lime & shale	2450		
lime & shale	2550		
lime & shale	2640		
shale & lime	2745		
shale & lime	2830		
shale & lime	2905		
shale & lime	2975		
lime & shale	3050		
lime & shale	3100		
lime & shale	3130		
lime & shale	3175	Heebner	3171
shale & lime	3225	Lansing	3210
lime	3270		
lime	3295		
lime	3330		
lime	3360		
lime	3400		
lime	3425		
lime & shale	3445		
conglomerate & lime	3475	Conglomerate	3492
shale & lime	3500		
conglomerate	3530		
shale & lime	3545		
cherty conglomerate	3600		
cherty conglomerate	3612	T. D.	

I hereby certify that this is a true and correct log of the above described well as shown by the drilling reports.

DIZDAR & NYE DRILLING COMPANY

By Glenn R. Nye

STATE OF KANSAS)
) SS
ELLIS COUNTY)

Subscribed and sworn to before me, a notary public, in and for said County and State this 31st day of December, 1951.

John L. Spicer
Notary Public

My Commission Expires, May 9, 1953

