


DISTRICT CONSERVATION AGENT'S REPORT

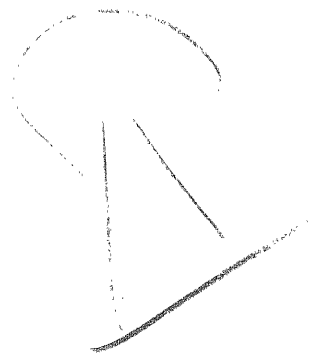

TO:

State Corporation Commission
 Conservation Division
 800 Bitting Building
 Wichita, Kansas

FILE NO. 20-7

LOCATION NW NW SW

SEC. 9 TWP. 9 RGE. 19

Dry Hole _____ Abandoned Oil Well Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Mc Clellan

Operator Fred Asbury Address Hoisington, Kans

Field _____ County Rooks

Total Depth 3574 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 974' circulated with cement - 5 1/2" at 3530' with 100 sax cement behind.

Perforated at 3300', squeezed off with cement by Halliburton, Filled hole with chatnto 3525' run 4 sax cement with dump bailer, pulled 2225' 5 1/2", filled hole with heavy mud to 250', set rock bridge and 15 sax cement, filled with heavy mud to 40', set rock bridge and 10 sax cement to bottom cellar.

RECEIVED

Conservation
 8-18-50
 AUG 18 1950

PLUGGING
 FILE SEC 9 T 9 R 19
 BOOK PAGE 20 LINE 7

STATE CORPORATION District Conservation Agent
 Date 8-14-50