

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-22574-00-00

Spot: ^{NW} SESWNW

Sec/Twnshp/Rge: 7-34S-37W

2101 feet from N Section Line,

685 feet from W Section Line

Lease Name: HOFFMAN ESTATE

Well #: 71

County: STEVENS

Total Vertical Depth: 6700 feet

Operator License No.: 5278

Op Name: EOG RESOURCES, INC.

Address: 3817 NW EXPRESSWAY STE 500
OKLAHOMA CITY, OK 73112

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		6491		WITH 2 SX CMT
PROD	4.5	6698	2285	WITH 250 SX CMT <i>217.75</i>
SURF	8.625	1708		WITH 480 SX CMT

Well Type: DH

UIC Docket No:

Date/Time to Plug: 10/30/2007 11:00 AM

Plug Co. License No.: 33338

Plug Co. Name: ORR ENTERPRISES, INC.

Proposal Rcvd. from: TERRY MAXWELL

Company: EOG RESOURCES

Phone: (405) 246-3100

Proposed Plugging Method: CIBP @ 6491' WITH 2 SX CMT. PLUG AT 1740' WITH 50 SX CMT. PLUG AT 660' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: LINDLEY REIMER

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 10/30/2007 2:30 PM

KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 6491' WITH 2 SX CMT. 1ST PLUG AT 2299' WITH 40 SX CMT. 2ND PLUG AT 1827' WITH 100 SX CMT. 3RD PLUG AT 660' WITH 40 SX CMT. 4TH PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
6541	6549		


RECEIVED
KANSAS CORPORATION COMMISSION
NOV 29 2007

Remarks: USED CLASS C CEMENT BY ORR ENTERPRISES.

Plugged through: TBG

CONSERVATION DIVISION
WICHITA, KS

District: 01

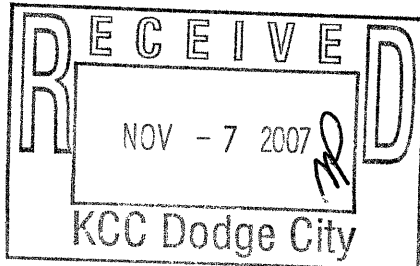

Signed

Ken Jehlik

(TECHNICIAN)

Form *CP-23*