

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21308-00-00
Spot: SESW Sec/Twnshp/Rge: 22-32S-19W
780 feet from S Section Line, 3380 feet from E Section Line
Lease Name: RICH C Well #: 10
County: COMANCHE Total Vertical Depth: 5930 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PKWY
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4130		WITH 2 SX CMT
PROD	5.5	5928	0	WITH 275 SX CMT
SURF	8.625	761		WITH 275 SX CMT

192.73

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 11/14/2007 10:00 AM
Plug Co. License No.: 33346 Plug Co. Name: TR SERVICE AND RENTAL, INC.
Proposal Rcvd. from: BARRY WALTERS Company: TR SERVICE & RENTAL Phone: (620) 672-9100

Proposed Plugging Method: CIBP @ 4130' WITH 2 SX CMT. PERFORATE AT 780'. PUMP 250 SX CMT. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: _____ Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 11/14/2007 2:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

JUNK IN HOLE: 2 7/8" TBG. TOP OF FISH @ 4152'. SET CIBP @ 4130' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. PERFORATE 5 1/2" CASING AT 780'. PUMPED DOWN 5 1/2" CASING WITH 250 SX CMT. CMT CIRCULATED UP 5 1/2" X 8 5/8" ANNULUS BACK TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5802	5818		

RECEIVED
KANSAS CORPORATION COMMISSION


NOV 29 2007

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC SERVICES.

Plugged through: CSG

District: 01

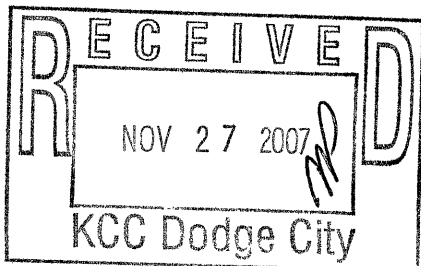

Signed _____

Steve Pfeifer

(TECHNICIAN)

PKT