

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21378-00-00
Spot: NWNWNW Sec/Twnshp/Rge: 4-31S-18W
330 feet from N Section Line, 440 feet from W Section Line
Lease Name: UNRUH A Well #: 4
County: COMANCHE Total Vertical Depth: 5150 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PKWY
WICHITA, KS 67206

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|-----------------|
| PROD | 4.5 | 5142 | 3600 | WITH 135 SX CMT |
| SURF | 8.625 | 781 | | WITH 190 SX CMT |

167.38

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 11/12/2007 2:30 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: CIBP @ 4950' WITH 4 SX CMT. PLUG AT 1200' WITH 50 SX CMT. PLUG AT 790' WITH 50 SX CMT. PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE
Date/Time Plugging Completed: 11/12/2007 4:30 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

SET CIBP @ 4950' WITH 4 SX CMT. 1ST PLUG AT 1200' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 790' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 5045 | 5047 | | SPF |
| 5029 | 5033 | | SPF |
| 5010 | 5017 | | SPF |


INVOICED
DATE 11-30-07
INV. NO. 2008060828

RECEIVED
NOV 13 2007
KCC WICHITA

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY CEMENTING.

Plugged through: CSG

District: 01

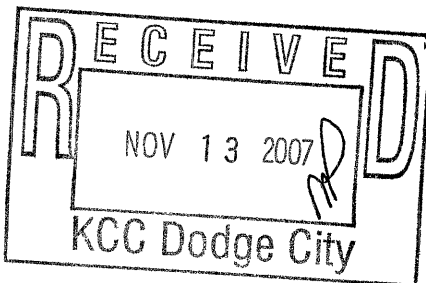

Signed

Steve Durrant

(TECHNICIAN)

PKT