

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-097-21443-00-00  
Spot: S2SENV Sec/Twnshp/Rge: 24-29S-19W  
2225 feet from N Section Line, 1970 feet from W Section Line  
Lease Name: KOEHN Well #: 1-24  
County: KIOWA Total Vertical Depth: 5090 feet

Operator License No.: 5004  
Op Name: VINCENT OIL CORPORATION  
Address: 155 N MARKET STE 700  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3651	2470	WITH 140 SX CMT
SURF	8.625	365		WITH 200 SX CMT

165.43

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/08/2007 9:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3510' WITH 4 SX CMT. PLUG AT 1260' WITH 15 SX GEL - 50 SX CMT. PLUG AT 400' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 11/08/2007 11:00 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SAND BACK TO 3510' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 1260' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 400' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3563	3570		


INVOICED  
DATE 11-30-07  
INV. NO. 2008060832

RECEIVED  
NOV 19 2007  
KCC WICHITA

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY CEMENTING.

Plugged through: CSG

District: 01

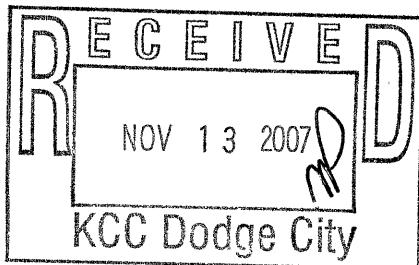

Signed Eric MacLaren  
(TECHNICIAN)

PKT