

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-20483-00-00
Spot: SW Sec/Twnshp/Rge: 20-24S-15W
600 feet from S Section Line, 1320 feet from W Section Line
Lease Name: RATZLAFF Well #: 1
County: STAFFORD Total Vertical Depth: 4300 feet

Operator License No.: 5135
Op Name: FARMER, JOHN O., INC.
Address: 370 W WICHITA AVE PO BOX 352
RUSSELL, KS 67665

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4299	0	WITH 100 SX CMT
SURF	8.625	264		WITH 225 SX CMT 139.75

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 11/07/2007 11:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: VAL DREHER Company: JOHN O. FARMER Phone: (785) 483-8356

Proposed Plugging Method: PUMP 25 SX CMT & 200# HULLS. PERFORATE AT 1030'. RUN TBG TO 1030'. PUMP CMT THROUGH PERFS & 8 5/8" TO SURFACE.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 11/07/2007 2:45 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

RAN TUBING TO 4150' & PUMPED 25 SX CMT W/150# HULLS MIXED DOWN TUBING. PERFORATED 4 1/2" @ 1030'. PULLED TBG TO 1030'. PUMPED 325 SX CMT DOWN TUBING. CIRCULATED CMT TO SURFACE UP 4 1/2" CASING AND 8 5/8" X 4 1/2" ANNULUS. PULLED TUBING. TOPPED OFF HOLE WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4247	4253		


INVOICED
DATE 11-15-07
INV. NO. 2008060776

RECEIVED
KANSAS CORPORATION COMMISSION
NOV 13 2007
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

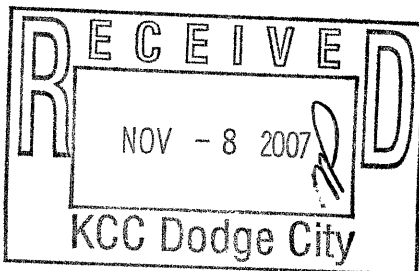

Signed

Richard W. Lacey

(TECHNICIAN)

PLG