

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-109-20696-00-01
Spot: SESWSW Sec/Twnshp/Rge: 13-12S-33W
330 feet from S Section Line, 990 feet from W Section Line
Lease Name: STOECKER "OWWO" Well #: 1-13
County: LOGAN Total Vertical Depth: 2697 feet

Operator License No.: 4629
Op Name: BRITO OIL COMPANY, INC.
Address: PO BOX 104
WICHITA, KS 67201

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	219		

87.65

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 11/10/2007 7:30 PM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: BERNIE MEYERS Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: Order 200 sxs 60/40 pozmix - 4% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.
Problems staying in old well bore.
Out of hole at anhydrite.
Decision made to plug and abandon at anhydrite.

Plugging Proposal Received By: HERB DEINES WitnessType: NONE
Date/Time Plugging Completed: 11/10/2007 9:45 PM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 2625' w/25 sxs.
2nd. Plug at 1700' w/100 sxs.
3rd. Plug at 275' w/40 sxs.
4th. Plug at 40' w/10 sxs.
Rathole with 15 sxs.
Mousehole with 10 sxs.

Perfs:

INVOICED
DATE 11-28-07
INV. NO. 2008060805

RECEIVED
KANSAS CORPORATION COMMISSION

NOV 16 2007


CONSERVATION DIVISION
WICHITA, KS

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed _____

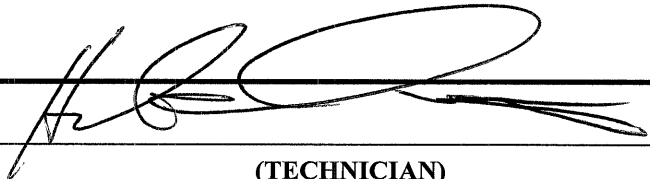

(TECHNICIAN)

NOV 14 2007

PKF