


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

15-163-00827-00-00

WELL PLUGGING RECORD

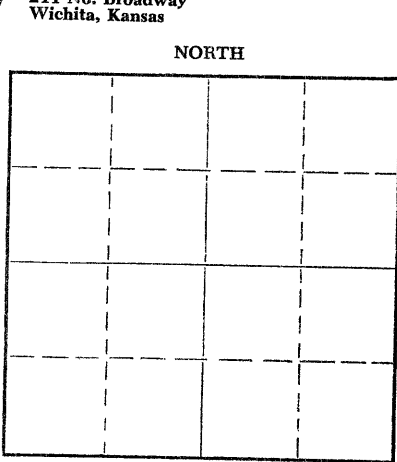

Locate well correctly on above  
Section Plat

Rooks \_\_\_\_\_ County. Sec. 17 Twp. 10S Rge. \_\_\_\_\_ (E) 20 (W)  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines SE/NW/NW  
Lease Owner JONES, SHELBURNE, & FARMER, INC.  
Lease Name Sutor "D" Well No. 1  
Office Address RUSSELL, KANSAS  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed May 1, 1955 19  
Application for plugging filed January 30, 1955 19  
Application for plugging approved January 31, 1955 19  
Plugging commenced 1-28-56 19 56  
Plugging completed 2-24-56 19 56  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3818 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	163	
				5 1/2"	3811	3238'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugging started 1-28-56 and completed 2-24-56. Measured in to TD 3818' and put in 20' sand and 4 sacks of cement. Shot casing off at 3238' and pulled pipe out of hole. Plugged well as follows: Filled hole with heavy mud to 160' and set permanent rock bridge. Dumped in 15 sacks of cement and filled hole with heavy mud to 35' of top; set permanent rock bridge and capped well with 10 sacks of cement.

Name of Plugging Contractor J. O. FORBES d/b/a FORBES CASING PULLING CO.  
Address P.O. Box 221, GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.


John O. Farmer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature) John O. Farmer  
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 7th day of March, 1956

My commission expires October 11, 1958

Lucille R. [Signature] Notary Public.

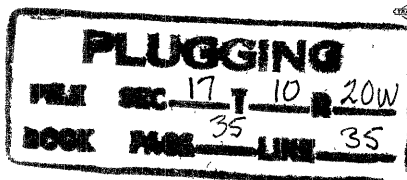

03-08-1956

