


KANSAS  
STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT'S REPORT

J. P. Roberts  
Assitant Director  
500 Insurance Building  
212 North Market  
Wichita 2, Kansas

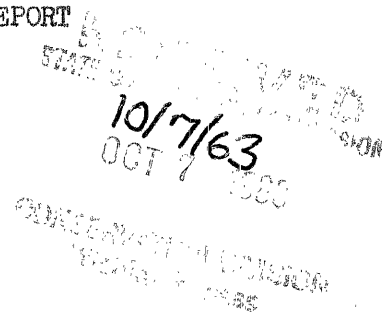

Operator's Full Name Morgenstern & Spectre, Inc.,

Complete Address: Box #661, Russell, Kansas.

Lease Name Farrell Well No. 1

Location NW-NW-SE Sec. 20 Twp. 9 Rge. (E) (W) 22

County Graham Total Depth 4098

Abandoned Oil Well X Gas Well  Input Well  SWD Well  D & A

Other well as hereafter indicated:

Plugging Contractor: Lynch Casing Pulling Co.,

Address: Rte. #4, Great Bend, Kansas. License No. 457

Operation Completed: Hour 11:00AM Day 4 Month 10 Year 1963

The Above well was plugged as follows:

200'--8 5/8" surface pipe, cement circulated. 3950'--5 1/2" production casing cemented with 125 Sx.

Sanded well back to to 3 935' and set 3 Sx. cement with dump bailer.

Pulled 5 1/2" to 620' and tried to circulate heavy gel mud, had to pull 5 1/2" to 490' before gaining circulation. Circulated heavy gel mud @ 490', (35 Sx.) and displaced 20 Sx cement thru Csg. Pulled 5 1/2" to 225' and displaced 20 Sx cement thru Csg. Pulled 5 1/2", set rock bridge @ 40' and 10 Sx cement to bottom of cellar.

I hereby certify that the above well was plugged as herein stated.

**INVOICED**

DATE 10/7/63  
INV. NO. 7841-W

Signed: W. L. Nichols  
Well Plugging Supervisor