

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-20770-00-00
Spot: NENESW Sec/Twnshp/Rge: 3-16S-26W
2477 feet from S Section Line, 3003 feet from E Section Line
Lease Name: NELSON Q Well #: 2
County: NESS Total Vertical Depth: 2005 feet

Operator License No.: 5086
Op Name: PINTAIL PETROLEUM, LTD.
Address: 225 N MARKET STE 300
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2045	0	
SURF	8.625	281		

65.16

Well Type: SWD UIC Docket No: D17137.0 Date/Time to Plug: 11/01/2007 1:30 PM
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC
Proposal Rcvd. from: BILLY BRINEY Company: WHITETAIL CRUDE, INC Phone: (785) 798-3641

Proposed Plugging Method: RUN TBG TO BOTTOM AND SPOT 50 SX CMT. WAIT TO SETUP AND TAG CMT. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 11/01/2007 4:15 PM KCC Agent: MICHAEL MAIER

Per district

Actual Plugging Report:

RUN TBG TO 1250' & SPOT 50 SX COMMON CMT W/3% CC & 100# HULLS. WAIT 1 1/2 HOURS. TAG CMT AT 750'. PUMP 75 SX CMT AND 200# HULLS. CIRCULATED TO SURFACE. PULLED TBG AND TOPPED OFF WITH 15 SX CMT. TIED ONTO BACKSIDE AND PUMPED 20 SX CMT. PRESSURED TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
1580	1715		

INVOICED
DATE 12-5-07
INV. NO. 2008060881

RECEIVED
KANSAS CORPORATION COMMISSION


NOV 29 2007

Remarks: USED COMMON CMT WITH 3% CC & 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

CONSERVATION DIVISION
WICHITA, KS

Plugged through: TBG

District: 01

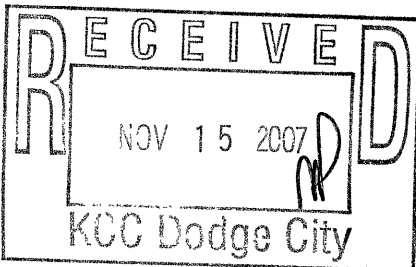

Signed

Michael Maier
(TECHNICIAN)