


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

15-163-00983-00-00

WELL PLUGGING RECORD

NORTH

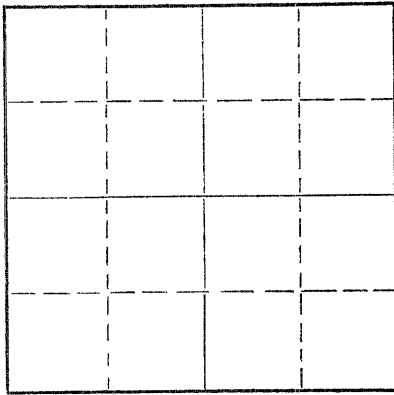

Locate well correctly on above  
Section Plat

Rocks \_\_\_\_\_ County. Sec. 35 Twp. 10 Rge. 20 (W) \_\_\_\_\_ (W)  
Location as "NE/CNW/SW" or footage from lines. NE/4 SE/4 SE/4  
Lease Owner Veeder Supply & Development Co.  
Lease Name Teall Well No. 1  
Office Address Box 201, Cherryvale, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed November 5 19 56  
Application for plugging filed November 5 19 56  
Application for plugging approved November 5 19 56  
Plugging commenced November 5 19 56  
Plugging completed November 5 19 56  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3785 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	223'	cemented w/125 sacks

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set plug at 210' with 1/2 sack hulls, 15 sacks cement. Mud to 40 feet.  
Set plug with 10 sacks cement and 1/2 sack hulls, cemented to bottom of cellar

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Veeder Supply & Development Co.  
Address Box 201, Cherryvale, Kansas

STATE OF Kansas, COUNTY OF Montgomery, ss.  
Leo C. Veeder

(~~employee of owner~~ or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo C. Veeder

Cherryvale, Kansas


(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 19 56

Loles Lawson

My commission expires July 11, 1956


Notary Public.



11-09-1956  
CONSERVATION DIVISION

15-163-00983-06-00

Veeder Supply & Dev'l. Co.



Cherryvale, Kansas

Drilled for Veeder Supply & Development Co. et al Farm Teall No. 1 Depth 3785  
 Contractor Veeder Supply & Development Co. Pipe 223' 8 5/8" csg w/125 sacks  
 Location NE/4 SE/4 SE/4 Sec. 35 Twp. 10S Range 20W  
 Commenced 10-25-1956 Completed 11-5-1956 County \_\_\_\_\_ Rooks \_\_\_\_\_ State Kansas

Cellar	0	9	9	TOP:	
Soil and sand	9	40	31	Topeka	3176'
Shale	40	540	500	Heebner	3391
Sand shale	540	1080	540	Arbuckle	3738
Sand	1080	1300	220		
Shale, sand, red bed	1300	1550	250		
Red Bed	1550	1557	7		
Anhydrite	1557	1600	43		
Shale shells	1600	2080	480		
Shale & lime streaks	2080	2215	135		
Shale lime	2215	2310	95		
Lime and shale	2310	2510	200		
Shale lime	2510	2670	160		
Lime and shale streaks	2670	2810	140		
Shale and lime	2810	2915	105		
Lime and shale	2915	3215	300		
Lime	3215	3700	485		
Lime, shale, chert	3700	3735	35		
Lime	3735	3785	50		
T. D.	3785				

Dry and Abandoned

AFFIDAVIT

STATE OF KANSAS )  
Montgomery County) SS

Leo C. Veeder, of lawful age, being first duly sworn on oath, deposes and says:

THAT he has read the above drilling log covering the Teall #1 well located in Section 35-10S-20W. Rooks County, Kansas, and that the same is true and correct. Further affiant saith not.

THE VEEDER SUPPLY AND DEVELOPMENT CO.

By: Leo C. Veeder  
Leo C. Veeder

Subscribed and sworn to before me this 8th day of November, 1956.

Les Lawson  
Notary Public

My commission expires July 11, 1960.

PLUGGING  
 FILE SEC 35 T 10 R20W  
 BOOK PAGE 114 LINE 34

STATE OF KANSAS  
 NOV 9 1956  
 CONSERVATION DEPARTMENT  
 WICHITA, KANSAS