


15-179-20272-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

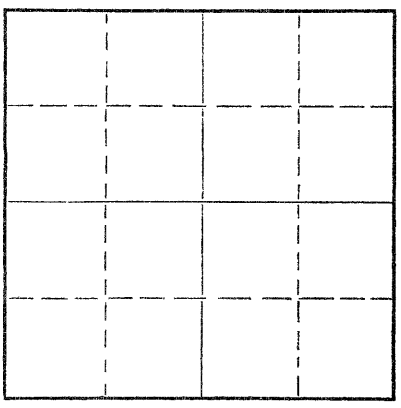

Locate well correctly on above Section Plat

Sheridan County, Sec. 29 Twp. 9 Rge. 26W (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE SW
Lease Owner Dunne-Gardner Petroleum, Inc.
Lease Name Friend Well No. #1
Office Address Suite 205 - 200 W. Douglas, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 18, 1970 19
Application for plugging filed October 18, 1970 19
Application for plugging approved October 18, 1970 19
Plugging commenced October 18, 1970 19
Plugging completed October 18, 1970 19
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 4025' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	266'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged through drill pipe @ 1240' w/100 sacks cement
Plugged through drill pipe @ 275' w/25 sacks cement
Plugged through drill pipe @ 40' w/10 sacks cement


RECEIVED
STATE CORPORATION COMMISSION
OCT 22 1970
CONSERVATION DIVISION
Wichita, Kansas
10-22-1970

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Chief Drilling Co., Inc.
Address Suite 905 Century Plaza, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK
Jim Robinson, employee of contractor
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson
Suite 905 Century Plaza, Wichita, Kansas
(Address)



SUBSCRIBED AND SWORN TO before me this 20th day of October, 19 70

Karen E. Duarte
Karen E. Duarte Notary Public.

15-179-20272-00-00

WELL LOG

Dunne-Gardner Petroleum, Inc.
Suite 205 - 200 W. Douglas
Wichita, Kansas

#1 FRIEND
NE NE SW Sec. 29-9-26W
Sheridan County, Kansas

CONTRACTOR: Chief Drilling Co., Inc.
Suite 905 Century Plaza
Wichita, Kansas 67202

COMMENCED: 10/12/70
COMPLETED: 10/18/70

CASING RECORD: Set 257' of 8 5/8" @ 266' w/200 sacks common quickset

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Sand, rock & blue shale	0	266	2612 Gr.
Shale	266	380	2614 D.F.
Shale w/sand streaks	380	1220	2617 K.B.
Sand and shale	1220	1551	
Sand, shale, & shell	1551	1720	<u>FORMATION TOPS</u>
Shale & shell	1720	1810	Anhydrite 2193 + 424
Sand & shale	1810	1975	Base 2236 + 381
Shale, shell, & redbed	1975	2193	Topeka 3546 - 929
Anhydrite	2193	2236	Heebner 3752 -1135
Shale & lime	2236	4025	Toronto 3771 -1154
Total depth	4025		Lansing 3786 -1169
			Base Kansas City 4023 -1406
			Total Depth 4025 -1408

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the NE NE SW of Section 29-9-26W, Sheridan County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

Jim Robinson
Jim Robinson, Office Manager

Subscribed and sworn to before me this 20th day of October, 1970.

Karen E. Duarte
Karen E. Duarte, Notary Public

