


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

15-163-01487 00-~~1~~ 02 kcc
apb

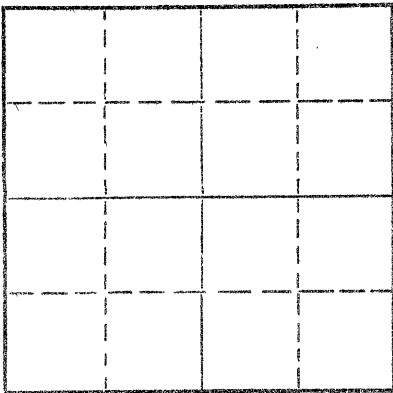

Locate well correctly on above Section Plat

Rooks _____ County, Sec. 6 Twp. 9 Rge. 17 (E) _____ (W) _____
Location as "NE/CNW/SW" or footage from lines NE NW NE SE
Lease Owner OKMAR OIL COMPANY
Lease Name MOOS Well No. 3
Office Address 970 Fourth Financial Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil - ~~Gas~~ OIL KCCap
Date well completed January 9 1955
Application for plugging filed March 15 1983
Application for plugging approved March 15 1983
Plugging commenced March 10 1983
Plugging completed March 15 1983
Reason for abandonment of well or producing formation Lost tubing in hole.

If a producing well is abandoned, date of last production October 23, 1970
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Dennis Hamel
Producing formation Arbuckle Depth to top 3371 Bottom 3378 Total Depth of Well 3378 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	101	None
				5-1/2"	3373	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fished tub to 1400'. Could not get below this point after fishing 4 days.

- Spot: 25 sx 50/50 Poz @ 1400'
- 25 sx 50/50 Poz w/ hulls @ 1200'
- 4 sx gel w/ hulls @ 1000'
- 50 sx 50/50 Poz @ 800'
- 25 sx 50/50 Poz @ 200' (Circulated to surface)
- Pumped 90 sx 50/50 Poz down casing
- Pumped 25 sx 50/50 Poz down casing annulus

RECEIVED
STATE CORPORATION COMMISSION
4/13/83
APR 13 1983
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor OKMAR OIL COMPANY
Address 970 Fourth Financial Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Evan C. Mayhew (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evan C Mayhew
970 Fourth Financial Center, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of April, 1983

My commission expires January 6, 1986
Nancy R. Edwards Notary Public.




Company - V. D. SIDNEY
Farm - Moos No. 3

SEC. 6 T. 9 R. 17W
NE NW SE

Total D. pth. 3378'
Comm. 12-22-54 Comp. 1-12-55

County Rooks KANSAS

Shot or Treated.
Contractor.
Issued. 7-28-56



8 5/8" CASING:
5" 101' 100 SX CMT
3372' 100 SX CMT

Elevation. 1958' RB

Production. 25 BOPD

Figure 1 - locate Bottom of Formations.

NO LOG AVAILABLE

Tops: Scout 3072
Heebner 3113
Lansing 3370
Arbuckle 3370

RECEIVED
STATE CORPORATION COMMISSION

MAR 1 1953

CONSERVATION DIVISION
Wichita, Kansas

3/1/53