

15-065-20223-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

GRAHAM County. Sec. 8 Twp. 10 Rge. 21 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C N/2 S/2 SW 1/4  
Lease Owner DANE G HANSEN TR  
Lease Name WHEELER #4 Well No.  
Office Address LOGAN, KANSAS  
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE  
Date well completed MAY 18, 1969 19  
Application for plugging filed MAY 18, 1969 19  
Application for plugging approved MAY 18, 1969 19  
Plugging commenced MAY 18, 1969 19  
Plugging completed MAY 18, 1969 19  
Reason for abandonment of well or producing formation TOO LOW STRUCTURALLY

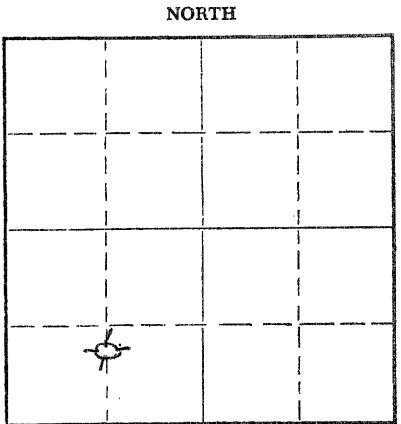

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well W L NICHOLS, MORELAND, KANSAS  
Producing formation Depth to top Bottom Total Depth of Well 3838 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	186.88'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

FILLED WITH HEAVY MUD TO 925'. SET PLUG.  
PUT IN 100 SACKS CEMENT. FILLED WITH HEAVY MUD TO 215'. SET PLUG. PUT IN 20 SACKS CEMENT. FILLED WITH HEAVY MUD TO 40'. FILLED TO TOP WITH 1 SACK HULLS AND 10 SACKS CEMENT.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 9 1969  
CONSERVATION DIVISION  
Wichita, Kansas


06-09-1969

Name of Plugging Contractor C-G DRILLING CO.  
Address 1107 UNION NATIONAL BLDG., WICHITA, KANSAS 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
G F GALLOWAY (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G F GALLOWAY  
1107 UNION NATIONAL BLDG.  
(Address)

Subscribed and sworn to before me this 22nd day of MAY, 1969  
My Commission Expires DEC 7, 1971  
PHYLLIS BUCHANAN Notary Public.



15-065-20223-00-00

W E L L L O G

OPERATOR: DANE G HANSEN TR.

WELL NAME: WHEELER #4 LOCATION: C N/2 S/2 SW 1/4

COUNTY: GRAHAM STATE: KANSAS

WELL COMMENCED: MAY 10, 69 WELL COMPLETED: MAY 18, 69

ELEVATION: 2237 KB TOTAL DEPTH: 3838'

PRODUCTION: DRY & ABANDONED RIG NO: 1

CASING - 8-5/8": 9 jts. 186.88' W/150 SX POZMIX

5-1/2": \_\_\_\_\_

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
186	820	SHALE	1/4° 500'	DST #1 3480-3500'
820	1290	SAND & SHALE	1/4° 1000'	DST #2 3515-3535'
1290	1465	SAND	1° 1500'	DST #3 3555-3577'
1465	1730	SHALE & SHELLS	1 1/2° 2000'	DST #4 3775-3790'
1730	1779	ANHYDRITE	1° 2500'	
1779	2585	SHALE & SHELLS	1° 3180'	
2585	3486	LIME & SHALE		
3486	3500	LIME		
3500	3535	LIME & SHALE		
3535	3790	LIME		

RECEIVED  
 STATE CORPORATION COMMISSION  
 JUN 9 1969  
 CONSERVATION DIVISION  
 Wichita, Kansas  
 06-09-1969

STATE OF KANSAS )  
 COUNTY OF SEDGWICK) SS:

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By G F GALLOWAY

G F GALLOWAY

AND SWORN TO, BEFORE ME, This 22nd day of MAY, 19 69.

DEC. 7, 1971

Phyllis Buchanan  
 PHYLLIS BUCHANAN - NOTARY PUBLIC

