

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-065-23375-00-00  
Spot: SENENE Sec/Twnshp/Rge: 14-10S-25W  
885 feet from N Section Line, 605 feet from E Section Line  
Lease Name: ALICE RUDER Well #: 1-14  
County: GRAHAM Total Vertical Depth: 4020 feet

Operator License No.: 31790  
Op Name: FREMONT EXPLORATION, INC.  
Address: 12412 SAINT ANDREWS DR  
OKLAHOMA CITY, OK 73120

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	221		130.65

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/07/2007 9:15 PM  
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC  
Proposal Rcvd. from: CHUCK RHOADES Company: WW DRILLING, LLC Phone: (785) 743-6774

Proposed Plugging Method: Order 190 sxs 60/40 pozmix - 4% gel with 1/4# flocele per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES WitnessType: NONE  
Date/Time Plugging Completed: 12/07/2007 11:15 PM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 2125' w/25 sxs.  
2nd. Plug at 1275' w/100 sxs.  
3rd. Plug at 275' w/40 sxs.  
4th. Plug at 40' w/10 sxs.  
Rathole with 15 sxs.

Perfs:

INVOICED  
DATE 12/19/07  
INV. NO. 2008060930


RECEIVED  
KANSAS CORPORATION COMMISSION  
DEC 12 2007  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

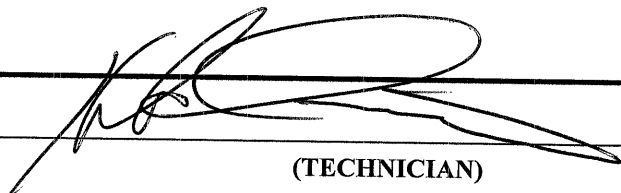

(TECHNICIAN)

