

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-025-21427-00-00
Spot: NWNWSE Sec/Twnshp/Rge: 29-30S-23W
2310 feet from S Section Line, 2310 feet from E Section Line
Lease Name: BOUZIDEN BROTHERS Well #: 1-29
County: CLARK Total Vertical Depth: 5575 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PKWY
WICHITA, KS 67206

String Size Depth (ft) Pulled (ft) Comments
SURF 8.625 685 WITH 375 SX CMT

181.79

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 11/13/2007 2:00 AM
Plug Co. License No.: 33724 Plug Co. Name: WARREN DRILLING, LLC
Proposal Rcvd. from: BOB KASPER Company: WARREN DRILLING, LLC Phone: (316) 729-0674

Proposed Plugging Method: 1ST PLUG AT 1300' WITH 50 SX CMT. 2ND PLUG AT 720' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 11/13/2007 4:30 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 1300' WITH 50 SX CMT. 2ND PLUG AT 720' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:

INVOICED
DATE 12/19/07
INV. NO. 2008060936

RECEIVED
KANSAS CORPORATION COMMISSION


DEC 14 2007

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: DP

District: 01

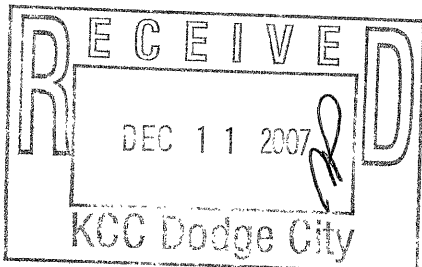

Signed Eric MacLaren
(TECHNICIAN)

Handwritten initials/signature in the bottom right corner.