

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24253-00-00
Spot: W2NW Sec/Twnshp/Rge: 11-18S-24W
4045 feet from S Section Line, 4776 feet from E Section Line
Lease Name: HOPPER Well #: 1
County: NESS Total Vertical Depth: 4419 feet

Operator License No.: 30742
Op Name: PALOMINO PETROLEUM, INC.
Address: 4924 SE 84TH ST
NEWTON, KS 67114

String	Size	Depth (ft)	Pulled (ft)	Comments
PC		1636		
PROD	5.5	4419	0	WITH 160 SX CMT 143.62
SURF	8.625	235		WITH 165 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/28/2007 9:30 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: PATRICK J. GERSTNER Company: PALOMINO PETROLEUM Phone: (316) 799-1000

Proposed Plugging Method: PUMP 35 SX CMT & 150# HULLS TO ANHYDRITE. CMT TO SURFACE. USE 50 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 11/28/2007 5:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED 35 SX CMT & 150# HULLS THEN 10 SX GEL. PRESSURED TO 2700# AND HELD. TIED ONTO BACKSIDE AND PUMPED 25 SX CMT. PRESSURED TO 500# & HELD. RAN TUBING TO 1200'. PUMPED 130 SX CMT. CMT CIRCULATED TO SURFACE. PULLED TUBING AND TOPPED OFF WITH 15 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4359	4365		


INVOICED
DATE 12-19-07
INV. NO. 2008060941

RECEIVED
KANSAS CORPORATION COMMISSION

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

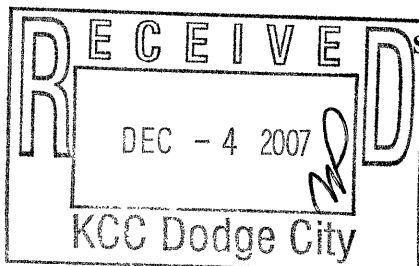

Signed Michael Maier
(TECHNICIAN)

DEC 11 2007
CONSERVATION DIVISION
WICHITA, KS

Handwritten initials/signature