

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-071-20030-00-00
Spot: NW Sec/Twnshp/Rge: 19-19S-40W
1320 feet from N Section Line, 1380 feet from W Section Line
Lease Name: MOYLE Well #: 1
County: GREELEY Total Vertical Depth: 2940 feet

Operator License No.: 4894
Op Name: HORSESHOE OPERATING, INC.
Address: 110 W LOUISIANA STE 200
MIDLAND, TX 79701

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2939	0	WITH 750 SX CMT
SURF	8.625	235		WITH 200 SX CMT

95.55

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/12/2007 2:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DAVE OLSEN Company: _____ Phone: (620) 376-8190

Proposed Plugging Method: PUMP 300# HULLS & 195 SX CMT DOWN 4 1/2" CASING. PUMP 75 SX CMT DOWN ANNULUS.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/12/2007 3:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

FILL 4 1/2" CASING FROM 2914' TO 0' USING 300# HULLS & 180 SX CMT. PRESSURE TO 500# & HELD. PUMP 5 SX CMT DOWN 4 1/2" X 8 5/8" ANNULUS. PRESSURE TO 300# & HELD.

Perfs:

Top	Bot	Thru	Comments
2905	2914		
2891	2894		

INVOICED
DATE 1-2-08
INV. NO. 2008061002

RECEIVED
KANSAS CORPORATION COMMISSION


DEC 27 2007

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

CONSERVATION DIVISION
WICHITA, KS

District: 01

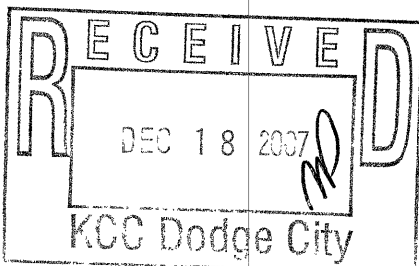

Signed _____

Ken Jehlik
(TECHNICIAN)

(TECHNICIAN)

PICT
Form CP-2/3