

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-129-10310-00-01
 Spot: SESE Sec/Twnshp/Rge: 32-34S-41W
660 feet from S Section Line, 660 feet from E Section Line
 Lease Name: WILBURTON MORROW SAND Well #: 1601W
 County: MORTON Total Vertical Depth: 5275 feet

Operator License No.: 5447
 Op Name: OXY USA INC.
 Address: 5 E GREENWAY PLZ PO BOX 27570
HOUSTON, TX 77227

String	Size	Depth (ft)	Pulled (ft)	Comments
PKR		4840		
PROD	4.5	4970	954	WITH 140 SX CMT
SURF	8.625	1469		WITH 650 SX CMT

171.44

Well Type: EOR UIC Docket No: _____ Date/Time to Plug: 12/07/2007 9:00 AM
 Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
 Proposal Rcvd. from: JOHN Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
 Date/Time Plugging Completed: 12/10/2007 3:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PACKER & 66.5 JOINTS OF TBG IN HOLE. TOP OF FISH @ 2738'. 1ST PLUG RUN TBG TO 2650' & PUMP 20 SX CMT ON TOP OF FISH. 2ND PLUG RUN TBG & PACKER TO 1524'. TESTED CASING TO 350#. 3RD PLUG 4 1/2" STUCK AT 1100'. PERFORATE 4 1/2" @ 1420'. PUMP 40 SX CMT. LEFT 16 SX CMT IN 4 1/2". 4TH PLUG SHOT OFF CASING AT 954'. PUMP 40 SX CMT AT 954'. 5TH PLUG PULL CASING TO 400' & PUMP 40 SX CMT. 6TH PLUG PULL CASING TO 40' & PUMP 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4870	4880		
4849	4864		

INVOICED
 DATE 1-2-08
 INV. NO. 2008061005

RECEIVED
 KANSAS CORPORATION COMMISSION
 DEC 27 2007
 CONSERVATION DIVISION
 WICHITA, KS

Remarks: USED COMMON CEMENT BY SARGENTS.
 Plugged through: CSG

District: 01

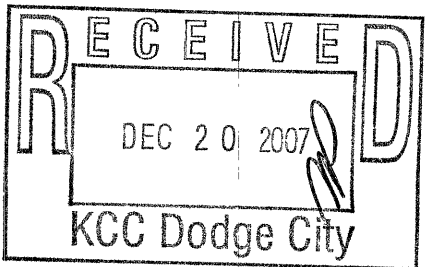

Signed Ken Jehlik (TECHNICIAN)