

DISTRICT CONSERVATION AGENT'S REPORT

TO:

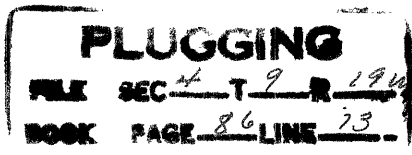
State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 86-13LOCATION NW NW NESEC. 4 TWP. 9 RGE. 19Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Mc ClellanOperator Westgate Greenland Address Wichita, KansField _____ County RooksTotal Depth 3449 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 159' circulated with cement - 5 1/2" at 3442' with100 sax cement behind- perforated at 883' - 5 1/2" circulatedto 0' with 230 sax cement.Lane Wells plugs to 3270' - top perforations at 3256'.Pumped hole full mud - 20 sax commercial mud - pumpedcementing plug to 325' followed by 40 sax cement, fillinghole with cement 325' to 0' .Mudding and cementing by Halliburton Co.

RECEIVED
STATE CORPORATION COMMISSION
3/30/53
MAR 30 1953
District Conservation Agent
Date 3-23-53
CONSERVATION DIVISION
Wichita, Kansas