


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

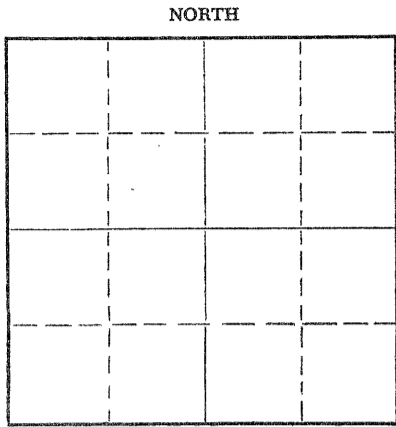

Locate well correctly on above
Section Plat

Morris County. Sec. 26 Twp. 16 Rge. 5 (E) E (W)
Location as "NE/CNW/SW" or footage from lines SE NE SE
Lease Owner Sunflower Drilling Co.
Lease Name Peterson #1 Well No. _____
Office Address Eureka, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 6-9-58 19____
Plugging completed 6-13-58 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Red Loyd
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2268' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10"	134'	none
				7"	2217'	1729'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked the hole to 2268' and found it open.
Filled w/sand to 2210' and ran 5 sacks of cement.
Pulled 7" casing, cleared hole and mudded to 250',
set a rock bridge to 240' and ran 10 sacks of
cement. Mudded the hole to 30', set a rock
bridge and ran 10 sacks of cement to base of
cellar.

6/19/58


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor West Supply Co., Inc.
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
R. K. Robbins (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. K. Robbins
Eureka, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 14 day of June, 19 58

My commission expires 9-27-58 Thomas V. Duggin Notary Public.

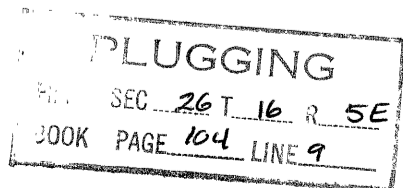

15-127-19007-00-00

Company Koester & Mergen
Farm Peterson No. 1

Sec. 26 T. 16 R. 3E
Loc. SE NE SE
County Morris

Total Depth 2268'
Comm. 6-29-50 Comp. 7-25-50
Contractor Menderhall Drig. Co.
Issued 3-31-51

Casing
10 134'
7 2217'

Elevation 1480 DFM

lime	7
lime, shale	436
shale, shells	830
lime, shale	1805
lime	1860
lime, shale brkn	1910
lime	1995
shale, shells	2150
shale	2216
chert	2218
Just 2218' Rotary Meas.	
2218 - 2220	
Cable tool Meas.	
chert	2238
Total Depth	
Tops; Scout	
chert	2216

PLUGGING

FILE SEC. 26 T. 16 R. 3E
BOOK PAGE 104 LINE 9