

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-127-19010-00-00
WELL PLUGGING RECORD

All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Morris

County. Sec. 26 Twp 16s, Rge. 5 (E) (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SE SE

Lease Owner Koester & Mergen

Lease Name Peterson Well No. 4

Office Address 302 Orpheum Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed March 26, 1952

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced March 24 1952

Plugging completed March 26 1952

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

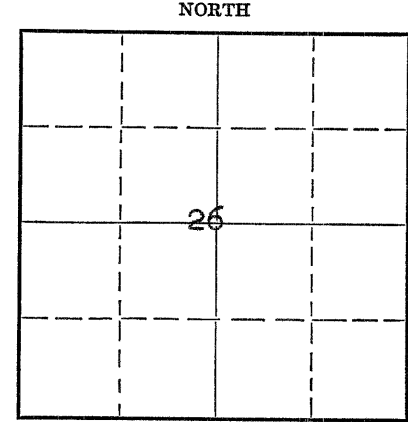

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Jimmie Robinson

Producing formation Miss. Chat Depth to top 2231 Bottom 2304 Total Depth of Well 2306 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Miss Chat	water	2251	2258			
" "	showoil	2265	2267			
" "	water increa	2294	2299			
				8 5/8	178	none
				5 1/2	2234	2014

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole with 75 buckets poured in, ripped and pulled pipe

Set 15 foot rock and dirt bridge at 200 feet

Put 15 sacks mixed cement on bridge

Filled hole with mud to 30 feet.

Put 15 foot rock and dirt bridge on mud.

5 sacks mixed cement on bridge.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J. F. Mergen, c/o Koester & Mergen, Address 302 Orpheum Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
J. F. Mergen (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature)


J. F. Mergen
302 Orpheum Bldg, Wichita
(Address)

SUBSCRIBED AND SWORN to before me this 2nd day of April, 1952

Beverly Hanson
Notary Public.

My commission expires October 2, 1954

28-5091-s 8-50-10M



15-127-19070-00-00

DRILLERS LOG

Company	Koester & Mergen	Commenced	2 - 18 - 52
Contractor	Slusser Drilling Co.	Completed	3 - 26 - 52
Farm	Peterson SE SE SE	Sec. 26 Twp. 16 Range 5 E	
8 5/8	⊙ 178	Morris Co. Kansas	
5 1/2	⊙ 2234		

ROTARY TOOLS

Surface Soil	5	
Clay & Gravel	65	
Shale & Broken Lime	160	
Lime	200	
Lime & Shale	300	
Shale & Shells	250	
Lime & Shale	375	
Shale & Lime	550	
Shale & Shells	1230	
Shale & Lime	1255	
Shale	1290	
Shale & Lime	1395	
Lime	1560	
Shale & Shells	1595	
Shale & Lime	1730	
Lime	2050	
Shale & Shells	2231	
Chat	2234	Rotary T. D.

CABLE TOOLS

2234 - 2235	Chat	Show Oil
2235 - 2251	Chat Firm	
2251 - 2258	Chat Firm	1 BWPH
2258 - 2265	Chat Hard	
2265 - 2288	Chat Soft	Show Oil 2265- 2267
2288 - 2294	Chat Firm	
2294 - 2299	Chat Soft	Increase Water
2299 - 2304	Chat	
2304 - 2306	Shale	T. D.

PLUGGING

218-16-52

3