


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

GRAHAM County. Sec. 13 Twp. 9 Rge. 22 (Ex) (W)

Location as "NE/CNW/SW" or footage from lines NW SE NE
Lease Owner UNION TEXAS PETROLEUM
Lease Name BUISS "C" Well No. 2
Office Address 1740 BROADWAY, SUITE B 400, DENVER, COLORADO
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed 19__
Application for plugging filed 19__
Application for plugging approved FEBRUARY 20 19 67
Plugging commenced APRIL 24 19 67
Plugging completed APRIL 24 19 67
Reason for abandonment of well or producing formation DEPLETED

NORTH

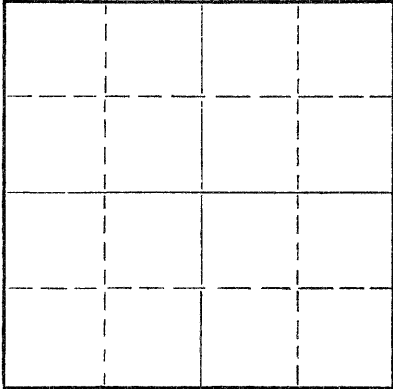

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well W. L. NICHOLS
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3789' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	256'	none
				5-1/2"	3783'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3789' to 400' - pumped 11 sacks jel mud
400' to base - pumped 50 sacks cement

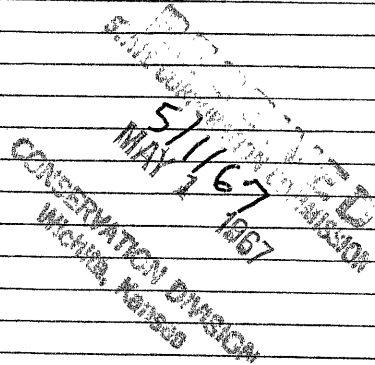

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC.,
Address BOX 562, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
T. L. NUTT (employee of owner) or (owner or operator)

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
BOX 562, GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 29 day of APRIL 1967

My commission expires JULY 31, 1970

[Signature] Notary Public.

DRILLER'S LOG

Company: Anderson-Frithard Oil Corp.

NW SE NE
 Sec. 13, Twp. 9S, Rge. 22W,
 County: Graham,
 Kansas

Farm: Buss "C" Well No. 2
 Total Depth: 3795'

Comm: 7-21-51 Comp: 7-30-51
 Contractor: Glenn W. Fowl
 Casing:

Elevation:

8 5/8" 256' cem.
 5 1/2" 3787' cem.

Production:

Figures below indicate bottom of formations

Clay, Sand & Shale	0 -	256
Shale		515
Shale & Shells		1215
Sand & Shale		1770
Shale		1795
Anhydrite		1825
Shale		2280
Lime & Shale		2460
Lime		2545
Shale		2645
Lime & Shale		3810
Lime		2950
Lime & Shale		3045
Shells & Lime		3145
Lime		3270
Lime & Shale		3375
Lime		3795
Total Depth		3795

This is to certify that the above information is, to the best of our knowledge true and correct.

GLENN W. FOWL

BY: Wm Herbert

SUBSCRIBED AND SWORN to before me this 2nd day of August, 1951.

My commission expires June 4, 1955 Marian M. Hefler
 Notary Public